

Please type a plus sign (+) inside this box → ☐

09-28-00  
PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 4143

First Inventor or Application Identifier Jaeger, Denny et al.

Title TOUCH SENSOR CONTROL DEVICES

Express Mail Label No. EL064616775US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 63]  
(preferred arrangement set forth below)
  - Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 12]
4. Oath or Declaration [Total Pages 4]
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d)  
(for continuation/divisional with Box 16 completed)
    - i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney  
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☒ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☒ \* Small Entity Statement(s) ☐ Statement filed in prior application  
(PTO/SB/09-12) Status still proper and desired
14. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
15. ☐ Other: .....

**NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

16. If a CONTINUING APPLICATION check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_ / \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.


## 17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name	Harris Zimmerman				
	Law Offices of Harris Zimmerman				
Address	1330 Broadway, Suite 710				
City	Oakland	State	California	Zip Code	94612-2506
Country	U.S.A.	Telephone	510.465.0828	Fax	510.465.2041

Name (Print/Type)	Harris Zimmerman	Registration No. (Attorney/Agent)	16,437
Signature		Date	9-26-2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

<h2 style="margin: 0;">FEE TRANSMITTAL</h2> <h3 style="margin: 0;">for FY 2000</h3> <p style="font-size: small; margin: 0;">Patent fees are subject to annual revision. Small Entity payments <u>must</u> be supported by a small entity statement, otherwise large entity fees must be paid. See Forms PTO/SB/09-12. See 37 C.F.R. §§ 1.27 and 1.28.</p>	<p style="text-align: center; font-weight: bold; margin: 0;">Complete if Known</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td style="width: 50%;">Application Number</td><td></td></tr> <tr><td>Filing Date</td><td></td></tr> <tr><td>First Named Inventor</td><td>Jaeger, Denny et al.</td></tr> <tr><td>Examiner Name</td><td></td></tr> <tr><td>Group / Art Unit</td><td></td></tr> <tr><td>Attorney Docket No.</td><td>4143</td></tr> </table>	Application Number		Filing Date		First Named Inventor	Jaeger, Denny et al.	Examiner Name		Group / Art Unit		Attorney Docket No.	4143
Application Number													
Filing Date													
First Named Inventor	Jaeger, Denny et al.												
Examiner Name													
Group / Art Unit													
Attorney Docket No.	4143												
<b>TOTAL AMOUNT OF PAYMENT</b> (\$) \$1,081.00													

METHOD OF PAYMENT (check one)	FEE CALCULATION (continued)																																																																																																																																																																																																																																																																																																																				
<p>1. <input type="checkbox"/> The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:</p> <p>Deposit Account Number: <span style="border: 1px solid black; padding: 2px;">26-0265</span></p> <p>Deposit Account Name: <span style="border: 1px solid black; padding: 2px;">Harris Zimmerman</span></p> <p><input checked="" type="checkbox"/> Charge Any Additional Fee Required Under 37 CFR §§ 1.16 and 1.17</p> <p>2. <input checked="" type="checkbox"/> Payment Enclosed:  <input checked="" type="checkbox"/> Check    <input type="checkbox"/> Money Order    <input type="checkbox"/> Other</p>	<p><b>3. ADDITIONAL FEES</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Large Entity</th> <th colspan="2">Small Entity</th> <th rowspan="2">Fee Description</th> <th rowspan="2">Fee Paid</th> </tr> <tr> <th>Fee Code</th> <th>Fee (\$)</th> <th>Fee Code</th> <th>Fee (\$)</th> </tr> </thead> <tbody> <tr><td>105</td><td>130</td><td>205</td><td>65</td><td>Surcharge - late filing fee or oath</td><td></td></tr> <tr><td>127</td><td>50</td><td>227</td><td>25</td><td>Surcharge - late provisional filing fee or cover sheet.</td><td></td></tr> <tr><td>139</td><td>130</td><td>139</td><td>130</td><td>Non-English specification</td><td></td></tr> <tr><td>147</td><td>2,520</td><td>147</td><td>2,520</td><td>For filing a request for reexamination</td><td></td></tr> <tr><td>112</td><td>920*</td><td>112</td><td>920*</td><td>Requesting publication of SIR prior to Examiner action</td><td></td></tr> <tr><td>113</td><td>1,840*</td><td>113</td><td>1,840*</td><td>Requesting publication of SIR after Examiner action</td><td></td></tr> <tr><td>115</td><td>110</td><td>215</td><td>55</td><td>Extension for reply within first month</td><td></td></tr> <tr><td>116</td><td>380</td><td>216</td><td>190</td><td>Extension for reply within second month</td><td></td></tr> <tr><td>117</td><td>870</td><td>217</td><td>435</td><td>Extension for reply within third month</td><td></td></tr> <tr><td>118</td><td>1,360</td><td>218</td><td>680</td><td>Extension for reply within fourth month</td><td></td></tr> <tr><td>128</td><td>1,850</td><td>228</td><td>925</td><td>Extension for reply within fifth month</td><td></td></tr> <tr><td>119</td><td>300</td><td>219</td><td>150</td><td>Notice of Appeal</td><td></td></tr> <tr><td>120</td><td>300</td><td>220</td><td>150</td><td>Filing a brief in support of an appeal</td><td></td></tr> <tr><td>121</td><td>260</td><td>221</td><td>130</td><td>Request for oral hearing</td><td></td></tr> <tr><td>138</td><td>1,510</td><td>138</td><td>1,510</td><td>Petition to institute a public use proceeding</td><td></td></tr> <tr><td>140</td><td>110</td><td>240</td><td>55</td><td>Petition to revive - unavoidable</td><td></td></tr> <tr><td>141</td><td>1,210</td><td>241</td><td>605</td><td>Petition to revive - unintentional</td><td></td></tr> <tr><td>142</td><td>1,210</td><td>242</td><td>605</td><td>Utility issue fee (or reissue)</td><td></td></tr> <tr><td>143</td><td>430</td><td>243</td><td>215</td><td>Design issue fee</td><td></td></tr> <tr><td>144</td><td>580</td><td>244</td><td>290</td><td>Plant issue fee</td><td></td></tr> <tr><td>122</td><td>130</td><td>122</td><td>130</td><td>Petitions to the Commissioner</td><td></td></tr> <tr><td>123</td><td>50</td><td>123</td><td>50</td><td>Petitions related to provisional applications</td><td></td></tr> <tr><td>126</td><td>240</td><td>126</td><td>240</td><td>Submission of Information Disclosure Stmt</td><td></td></tr> <tr><td>581</td><td>40</td><td>581</td><td>40</td><td>Recording each patent assignment per property (times number of properties)</td><td>40.00</td></tr> <tr><td>146</td><td>760</td><td>246</td><td>380</td><td>Filing a submission after final rejection (37 CFR § 1.129(a))</td><td></td></tr> <tr><td>149</td><td>760</td><td>249</td><td>380</td><td>For each additional invention to be examined (37 CFR § 1.129(b))</td><td></td></tr> <tr><td colspan="5">Other fee (specify) _____</td><td></td></tr> <tr><td colspan="5">Other fee (specify) _____</td><td></td></tr> <tr> <td colspan="2" style="text-align: right;"><b>SUBTOTAL (1)</b></td> <td colspan="2"></td> <td colspan="2"><b>(\$) 345.00</b></td> </tr> </tbody> </table>	Large Entity		Small Entity		Fee Description	Fee Paid	Fee Code	Fee (\$)	Fee Code	Fee (\$)	105	130	205	65	Surcharge - late filing fee or oath		127	50	227	25	Surcharge - late provisional filing fee or cover sheet.		139	130	139	130	Non-English specification		147	2,520	147	2,520	For filing a request for reexamination		112	920*	112	920*	Requesting publication of SIR prior to Examiner action		113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action		115	110	215	55	Extension for reply within first month		116	380	216	190	Extension for reply within second month		117	870	217	435	Extension for reply within third month		118	1,360	218	680	Extension for reply within fourth month		128	1,850	228	925	Extension for reply within fifth month		119	300	219	150	Notice of Appeal		120	300	220	150	Filing a brief in support of an appeal		121	260	221	130	Request for oral hearing		138	1,510	138	1,510	Petition to institute a public use proceeding		140	110	240	55	Petition to revive - unavoidable		141	1,210	241	605	Petition to revive - unintentional		142	1,210	242	605	Utility issue fee (or reissue)		143	430	243	215	Design issue fee		144	580	244	290	Plant issue fee		122	130	122	130	Petitions to the Commissioner		123	50	123	50	Petitions related to provisional applications		126	240	126	240	Submission of Information Disclosure Stmt		581	40	581	40	Recording each patent assignment per property (times number of properties)	40.00	146	760	246	380	Filing a submission after final rejection (37 CFR § 1.129(a))		149	760	249	380	For each additional invention to be examined (37 CFR § 1.129(b))		Other fee (specify) _____						Other fee (specify) _____						<b>SUBTOTAL (1)</b>				<b>(\$) 345.00</b>																																																																																																																													
Large Entity		Small Entity		Fee Description	Fee Paid																																																																																																																																																																																																																																																																																																																
Fee Code	Fee (\$)	Fee Code	Fee (\$)																																																																																																																																																																																																																																																																																																																		
105	130	205	65	Surcharge - late filing fee or oath																																																																																																																																																																																																																																																																																																																	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet.																																																																																																																																																																																																																																																																																																																	
139	130	139	130	Non-English specification																																																																																																																																																																																																																																																																																																																	
147	2,520	147	2,520	For filing a request for reexamination																																																																																																																																																																																																																																																																																																																	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action																																																																																																																																																																																																																																																																																																																	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action																																																																																																																																																																																																																																																																																																																	
115	110	215	55	Extension for reply within first month																																																																																																																																																																																																																																																																																																																	
116	380	216	190	Extension for reply within second month																																																																																																																																																																																																																																																																																																																	
117	870	217	435	Extension for reply within third month																																																																																																																																																																																																																																																																																																																	
118	1,360	218	680	Extension for reply within fourth month																																																																																																																																																																																																																																																																																																																	
128	1,850	228	925	Extension for reply within fifth month																																																																																																																																																																																																																																																																																																																	
119	300	219	150	Notice of Appeal																																																																																																																																																																																																																																																																																																																	
120	300	220	150	Filing a brief in support of an appeal																																																																																																																																																																																																																																																																																																																	
121	260	221	130	Request for oral hearing																																																																																																																																																																																																																																																																																																																	
138	1,510	138	1,510	Petition to institute a public use proceeding																																																																																																																																																																																																																																																																																																																	
140	110	240	55	Petition to revive - unavoidable																																																																																																																																																																																																																																																																																																																	
141	1,210	241	605	Petition to revive - unintentional																																																																																																																																																																																																																																																																																																																	
142	1,210	242	605	Utility issue fee (or reissue)																																																																																																																																																																																																																																																																																																																	
143	430	243	215	Design issue fee																																																																																																																																																																																																																																																																																																																	
144	580	244	290	Plant issue fee																																																																																																																																																																																																																																																																																																																	
122	130	122	130	Petitions to the Commissioner																																																																																																																																																																																																																																																																																																																	
123	50	123	50	Petitions related to provisional applications																																																																																																																																																																																																																																																																																																																	
126	240	126	240	Submission of Information Disclosure Stmt																																																																																																																																																																																																																																																																																																																	
581	40	581	40	Recording each patent assignment per property (times number of properties)	40.00																																																																																																																																																																																																																																																																																																																
146	760	246	380	Filing a submission after final rejection (37 CFR § 1.129(a))																																																																																																																																																																																																																																																																																																																	
149	760	249	380	For each additional invention to be examined (37 CFR § 1.129(b))																																																																																																																																																																																																																																																																																																																	
Other fee (specify) _____																																																																																																																																																																																																																																																																																																																					
Other fee (specify) _____																																																																																																																																																																																																																																																																																																																					
<b>SUBTOTAL (1)</b>				<b>(\$) 345.00</b>																																																																																																																																																																																																																																																																																																																	
<p><b>1. BASIC FILING FEE</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Large Entity</th> <th colspan="2">Small Entity</th> <th rowspan="2">Fee Description</th> <th rowspan="2">Fee Paid</th> </tr> <tr> <th>Fee Code</th> <th>Fee (\$)</th> <th>Fee Code</th> <th>Fee (\$)</th> </tr> </thead> <tbody> <tr><td>101</td><td>760</td><td>201</td><td>380</td><td>Utility filing fee</td><td>345.00</td></tr> <tr><td>106</td><td>310</td><td>206</td><td>155</td><td>Design filing fee</td><td></td></tr> <tr><td>107</td><td>480</td><td>207</td><td>240</td><td>Plant filing fee</td><td></td></tr> <tr><td>108</td><td>760</td><td>208</td><td>380</td><td>Reissue filing fee</td><td></td></tr> <tr><td>114</td><td>150</td><td>214</td><td>75</td><td>Provisional filing fee</td><td></td></tr> <tr> <td colspan="2" style="text-align: right;"><b>SUBTOTAL (1)</b></td> <td colspan="2"></td> <td colspan="2"><b>(\$) 345.00</b></td> </tr> </tbody> </table> <p><b>2. EXTRA CLAIM FEES</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Total Claims</th> <th colspan="2">Extra Claims</th> <th colspan="2">Fee from below</th> <th colspan="2">Fee Paid</th> </tr> </thead> <tbody> <tr> <td>93</td> <td>-20** =</td> <td>73</td> <td>x</td> <td>9.00</td> <td>=</td> <td>657.00</td> <td></td> </tr> <tr> <td>4</td> <td>-3** =</td> <td>1</td> <td>x</td> <td>39.00</td> <td>=</td> <td>39.00</td> <td></td> </tr> <tr> <td colspan="2">Multiple Dependent</td> <td></td> <td></td> <td></td> <td>=</td> <td></td> <td></td> </tr> </tbody> </table> <p>**or number previously paid, if greater; For Reissues, see below</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Large Entity</th> <th colspan="2">Small Entity</th> <th rowspan="2">Fee Description</th> <th rowspan="2">Fee Paid</th> </tr> <tr> <th>Fee Code</th> <th>Fee (\$)</th> <th>Fee Code</th> <th>Fee (\$)</th> </tr> </thead> <tbody> <tr><td>103</td><td>18</td><td>203</td><td>9</td><td>Claims in excess of 20</td><td></td></tr> <tr><td>102</td><td>78</td><td>202</td><td>39</td><td>Independent claims in excess of 3</td><td></td></tr> <tr><td>104</td><td>260</td><td>204</td><td>130</td><td>Multiple dependent claim, if not paid</td><td></td></tr> <tr><td>109</td><td>78</td><td>209</td><td>39</td><td>** Reissue independent claims over original patent</td><td></td></tr> <tr><td>110</td><td>18</td><td>210</td><td>9</td><td>** Reissue claims in excess of 20 and over original patent</td><td></td></tr> <tr> <td colspan="2" style="text-align: right;"><b>SUBTOTAL (2)</b></td> <td colspan="2"></td> <td colspan="2"><b>(\$) 696.00</b></td> </tr> </tbody> </table>	Large Entity		Small Entity		Fee Description	Fee Paid	Fee Code	Fee (\$)	Fee Code	Fee (\$)	101	760	201	380	Utility filing fee	345.00	106	310	206	155	Design filing fee		107	480	207	240	Plant filing fee		108	760	208	380	Reissue filing fee		114	150	214	75	Provisional filing fee		<b>SUBTOTAL (1)</b>				<b>(\$) 345.00</b>		Total Claims		Extra Claims		Fee from below		Fee Paid		93	-20** =	73	x	9.00	=	657.00		4	-3** =	1	x	39.00	=	39.00		Multiple Dependent					=			Large Entity		Small Entity		Fee Description	Fee Paid	Fee Code	Fee (\$)	Fee Code	Fee (\$)	103	18	203	9	Claims in excess of 20		102	78	202	39	Independent claims in excess of 3		104	260	204	130	Multiple dependent claim, if not paid		109	78	209	39	** Reissue independent claims over original patent		110	18	210	9	** Reissue claims in excess of 20 and over original patent		<b>SUBTOTAL (2)</b>				<b>(\$) 696.00</b>		<p><b>3. ADDITIONAL FEES</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Large Entity</th> <th colspan="2">Small Entity</th> <th rowspan="2">Fee Description</th> <th rowspan="2">Fee Paid</th> </tr> <tr> <th>Fee Code</th> <th>Fee (\$)</th> <th>Fee Code</th> <th>Fee (\$)</th> </tr> </thead> <tbody> <tr><td>105</td><td>130</td><td>205</td><td>65</td><td>Surcharge - late filing fee or oath</td><td></td></tr> <tr><td>127</td><td>50</td><td>227</td><td>25</td><td>Surcharge - late provisional filing fee or cover sheet.</td><td></td></tr> <tr><td>139</td><td>130</td><td>139</td><td>130</td><td>Non-English specification</td><td></td></tr> <tr><td>147</td><td>2,520</td><td>147</td><td>2,520</td><td>For filing a request for reexamination</td><td></td></tr> <tr><td>112</td><td>920*</td><td>112</td><td>920*</td><td>Requesting publication of SIR prior to Examiner action</td><td></td></tr> <tr><td>113</td><td>1,840*</td><td>113</td><td>1,840*</td><td>Requesting publication of SIR after Examiner action</td><td></td></tr> <tr><td>115</td><td>110</td><td>215</td><td>55</td><td>Extension for reply within first month</td><td></td></tr> <tr><td>116</td><td>380</td><td>216</td><td>190</td><td>Extension for reply within second month</td><td></td></tr> <tr><td>117</td><td>870</td><td>217</td><td>435</td><td>Extension for reply within third month</td><td></td></tr> <tr><td>118</td><td>1,360</td><td>218</td><td>680</td><td>Extension for reply within fourth month</td><td></td></tr> <tr><td>128</td><td>1,850</td><td>228</td><td>925</td><td>Extension for reply within fifth month</td><td></td></tr> <tr><td>119</td><td>300</td><td>219</td><td>150</td><td>Notice of Appeal</td><td></td></tr> <tr><td>120</td><td>300</td><td>220</td><td>150</td><td>Filing a brief in support of an appeal</td><td></td></tr> <tr><td>121</td><td>260</td><td>221</td><td>130</td><td>Request for oral hearing</td><td></td></tr> <tr><td>138</td><td>1,510</td><td>138</td><td>1,510</td><td>Petition to institute a public use proceeding</td><td></td></tr> <tr><td>140</td><td>110</td><td>240</td><td>55</td><td>Petition to revive - unavoidable</td><td></td></tr> <tr><td>141</td><td>1,210</td><td>241</td><td>605</td><td>Petition to revive - unintentional</td><td></td></tr> <tr><td>142</td><td>1,210</td><td>242</td><td>605</td><td>Utility issue fee (or reissue)</td><td></td></tr> <tr><td>143</td><td>430</td><td>243</td><td>215</td><td>Design issue fee</td><td></td></tr> <tr><td>144</td><td>580</td><td>244</td><td>290</td><td>Plant issue fee</td><td></td></tr> <tr><td>122</td><td>130</td><td>122</td><td>130</td><td>Petitions to the Commissioner</td><td></td></tr> <tr><td>123</td><td>50</td><td>123</td><td>50</td><td>Petitions related to provisional applications</td><td></td></tr> <tr><td>126</td><td>240</td><td>126</td><td>240</td><td>Submission of Information Disclosure Stmt</td><td></td></tr> <tr><td>581</td><td>40</td><td>581</td><td>40</td><td>Recording each patent assignment per property (times number of properties)</td><td>40.00</td></tr> <tr><td>146</td><td>760</td><td>246</td><td>380</td><td>Filing a submission after final rejection (37 CFR § 1.129(a))</td><td></td></tr> <tr><td>149</td><td>760</td><td>249</td><td>380</td><td>For each additional invention to be examined (37 CFR § 1.129(b))</td><td></td></tr> <tr><td colspan="5">Other fee (specify) _____</td><td></td></tr> <tr><td colspan="5">Other fee (specify) _____</td><td></td></tr> <tr> <td colspan="2" style="text-align: right;"><b>SUBTOTAL (3)</b></td> <td colspan="2"></td> <td colspan="2"><b>(\$) 40.00</b></td> </tr> </tbody> </table>	Large Entity		Small Entity		Fee Description	Fee Paid	Fee Code	Fee (\$)	Fee Code	Fee (\$)	105	130	205	65	Surcharge - late filing fee or oath		127	50	227	25	Surcharge - late provisional filing fee or cover sheet.		139	130	139	130	Non-English specification		147	2,520	147	2,520	For filing a request for reexamination		112	920*	112	920*	Requesting publication of SIR prior to Examiner action		113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action		115	110	215	55	Extension for reply within first month		116	380	216	190	Extension for reply within second month		117	870	217	435	Extension for reply within third month		118	1,360	218	680	Extension for reply within fourth month		128	1,850	228	925	Extension for reply within fifth month		119	300	219	150	Notice of Appeal		120	300	220	150	Filing a brief in support of an appeal		121	260	221	130	Request for oral hearing		138	1,510	138	1,510	Petition to institute a public use proceeding		140	110	240	55	Petition to revive - unavoidable		141	1,210	241	605	Petition to revive - unintentional		142	1,210	242	605	Utility issue fee (or reissue)		143	430	243	215	Design issue fee		144	580	244	290	Plant issue fee		122	130	122	130	Petitions to the Commissioner		123	50	123	50	Petitions related to provisional applications		126	240	126	240	Submission of Information Disclosure Stmt		581	40	581	40	Recording each patent assignment per property (times number of properties)	40.00	146	760	246	380	Filing a submission after final rejection (37 CFR § 1.129(a))		149	760	249	380	For each additional invention to be examined (37 CFR § 1.129(b))		Other fee (specify) _____						Other fee (specify) _____						<b>SUBTOTAL (3)</b>				<b>(\$) 40.00</b>	
Large Entity		Small Entity		Fee Description			Fee Paid																																																																																																																																																																																																																																																																																																														
Fee Code	Fee (\$)	Fee Code	Fee (\$)																																																																																																																																																																																																																																																																																																																		
101	760	201	380	Utility filing fee	345.00																																																																																																																																																																																																																																																																																																																
106	310	206	155	Design filing fee																																																																																																																																																																																																																																																																																																																	
107	480	207	240	Plant filing fee																																																																																																																																																																																																																																																																																																																	
108	760	208	380	Reissue filing fee																																																																																																																																																																																																																																																																																																																	
114	150	214	75	Provisional filing fee																																																																																																																																																																																																																																																																																																																	
<b>SUBTOTAL (1)</b>				<b>(\$) 345.00</b>																																																																																																																																																																																																																																																																																																																	
Total Claims		Extra Claims		Fee from below		Fee Paid																																																																																																																																																																																																																																																																																																															
93	-20** =	73	x	9.00	=	657.00																																																																																																																																																																																																																																																																																																															
4	-3** =	1	x	39.00	=	39.00																																																																																																																																																																																																																																																																																																															
Multiple Dependent					=																																																																																																																																																																																																																																																																																																																
Large Entity		Small Entity		Fee Description	Fee Paid																																																																																																																																																																																																																																																																																																																
Fee Code	Fee (\$)	Fee Code	Fee (\$)																																																																																																																																																																																																																																																																																																																		
103	18	203	9	Claims in excess of 20																																																																																																																																																																																																																																																																																																																	
102	78	202	39	Independent claims in excess of 3																																																																																																																																																																																																																																																																																																																	
104	260	204	130	Multiple dependent claim, if not paid																																																																																																																																																																																																																																																																																																																	
109	78	209	39	** Reissue independent claims over original patent																																																																																																																																																																																																																																																																																																																	
110	18	210	9	** Reissue claims in excess of 20 and over original patent																																																																																																																																																																																																																																																																																																																	
<b>SUBTOTAL (2)</b>				<b>(\$) 696.00</b>																																																																																																																																																																																																																																																																																																																	
Large Entity		Small Entity		Fee Description	Fee Paid																																																																																																																																																																																																																																																																																																																
Fee Code	Fee (\$)	Fee Code	Fee (\$)																																																																																																																																																																																																																																																																																																																		
105	130	205	65	Surcharge - late filing fee or oath																																																																																																																																																																																																																																																																																																																	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet.																																																																																																																																																																																																																																																																																																																	
139	130	139	130	Non-English specification																																																																																																																																																																																																																																																																																																																	
147	2,520	147	2,520	For filing a request for reexamination																																																																																																																																																																																																																																																																																																																	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action																																																																																																																																																																																																																																																																																																																	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action																																																																																																																																																																																																																																																																																																																	
115	110	215	55	Extension for reply within first month																																																																																																																																																																																																																																																																																																																	
116	380	216	190	Extension for reply within second month																																																																																																																																																																																																																																																																																																																	
117	870	217	435	Extension for reply within third month																																																																																																																																																																																																																																																																																																																	
118	1,360	218	680	Extension for reply within fourth month																																																																																																																																																																																																																																																																																																																	
128	1,850	228	925	Extension for reply within fifth month																																																																																																																																																																																																																																																																																																																	
119	300	219	150	Notice of Appeal																																																																																																																																																																																																																																																																																																																	
120	300	220	150	Filing a brief in support of an appeal																																																																																																																																																																																																																																																																																																																	
121	260	221	130	Request for oral hearing																																																																																																																																																																																																																																																																																																																	
138	1,510	138	1,510	Petition to institute a public use proceeding																																																																																																																																																																																																																																																																																																																	
140	110	240	55	Petition to revive - unavoidable																																																																																																																																																																																																																																																																																																																	
141	1,210	241	605	Petition to revive - unintentional																																																																																																																																																																																																																																																																																																																	
142	1,210	242	605	Utility issue fee (or reissue)																																																																																																																																																																																																																																																																																																																	
143	430	243	215	Design issue fee																																																																																																																																																																																																																																																																																																																	
144	580	244	290	Plant issue fee																																																																																																																																																																																																																																																																																																																	
122	130	122	130	Petitions to the Commissioner																																																																																																																																																																																																																																																																																																																	
123	50	123	50	Petitions related to provisional applications																																																																																																																																																																																																																																																																																																																	
126	240	126	240	Submission of Information Disclosure Stmt																																																																																																																																																																																																																																																																																																																	
581	40	581	40	Recording each patent assignment per property (times number of properties)	40.00																																																																																																																																																																																																																																																																																																																
146	760	246	380	Filing a submission after final rejection (37 CFR § 1.129(a))																																																																																																																																																																																																																																																																																																																	
149	760	249	380	For each additional invention to be examined (37 CFR § 1.129(b))																																																																																																																																																																																																																																																																																																																	
Other fee (specify) _____																																																																																																																																																																																																																																																																																																																					
Other fee (specify) _____																																																																																																																																																																																																																																																																																																																					
<b>SUBTOTAL (3)</b>				<b>(\$) 40.00</b>																																																																																																																																																																																																																																																																																																																	

<b>SUBMITTED BY</b>		<b>Complete (if applicable)</b>	
Name (Print/Type)	Harris Zimmerman	Registration No. (Attorney/Agent)	16,437
Signature		Telephone	510.465.0828
		Date	9-26-2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Applicant(s)\Inventor(s): **Denny Jaeger, Kenneth M. Twain, and John Ream**

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS  
(37 CFR 1.9(f) and 1.27(c)) - SMALL BUSINESS CONCERN**

I hereby claim that I am ☐ the owner of the small business concern identified below; or ☒ an official of the small business concern empowered to act on behalf of the concern identified below:

Intertact Corporation

I hereby declare that the above-identified small business concern qualifies as a small business concern as identified in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under § 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time, or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to or remain with the small business concern identified above with regard to the invention, titled: **TOUCH SENSOR CONTROL DEVICES**, inventors, Denny Jaeger, Kenneth M. Twain and John Ream and described in the specification filed herewith.

If the rights held by the above-identified small business concern are not exclusive, each individual, concern, or organization having rights to the invention is listed below, and no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 CFR 1.9(d) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e):  
☒ None \_\_\_\_\_

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate (37 CFR 1.28(b)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under § 1001 of Title 18 of the U.S. Code and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Signature: \_\_\_\_\_

Denny Jaeger  
Chairman

Date: \_\_\_\_\_

9-25-00

09670610-092600

Atty. Docket No.: 4143

Applicant(s)\Inventor(s): Denny Jaeger, Kenneth M. Twain, and John Ream

Title: TOUCH SENSOR CONTROL DEVICES

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS  
(37 CFR 1.9(f) and 1.27(b)) - INDEPENDENT INVENTOR(S)**

As below inventor(s), I/we hereby declare that I/we qualify as an independent inventor(s) as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under §§ 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention titled above and described in:

☒ Specification Filed Herewith

☐ Application, Serial No. \_\_\_\_\_ Dated \_\_\_\_\_

☐ Patent No. \_\_\_\_\_ Issued \_\_\_\_\_

I/we have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I/we have assigned, granted, conveyed or licensed or am under obligation under contract or law to assign, grant, convey or license any rights in the invention is/are listed below:

☐ No such person, concern or organization.

☒ Persons, concerns or organizations listed below:

Full name Intertact Corporation



Address 6120 Valley View Road, Oakland, California 94611

☐ Individual ☒ Small business ☐ Nonprofit organization

I/We acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate (37 CFR 1.28[b]).

I/We hereby declare that all statements herein of my/our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under § 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

<u>Denny Jaeger</u>	<u>Kenneth M. Twain</u>	<u>John Ream</u>
Name	Name	Name

		
Signature	Signature	Signature

<u>9-25-00</u>	<u>9-25-00</u>	
Date	Date	Date

Applicant(s)\Inventor(s): Denny Jaeger, Kenneth M. Twain, and John Ream

Title: **TOUCH SENSOR CONTROL DEVICES****VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS  
(37 CFR 1.9(f) and 1.27(b)) - INDEPENDENT INVENTOR(S)**

As below inventor(s), I/we hereby declare that I/we qualify as an independent inventor(s) as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under §§ 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention **titled above** and described in:

☒ Specification Filed Herewith☐ Application, Serial No. \_\_\_\_\_ Dated \_\_\_\_\_☐ Patent No. \_\_\_\_\_ Issued \_\_\_\_\_


I/we have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I/we have assigned, granted, conveyed or licensed or am under obligation under contract or law to assign, grant, convey or license any rights in the invention is/are listed below:

☐ No such person, concern or organization.☒ Persons, concerns or organizations listed below:Full name Intertact CorporationAddress 6120 Valley View Road, Oakland, California 94611
☐ Individual      ☒ Small business      ☐ Nonprofit organization

I/We acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate (37 CFR 1.28[b]).

I/We hereby declare that all statements herein of my/our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under § 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

<u>Denny Jaeger</u>	<u>Kenneth M. Twain</u>	<u>John Ream</u>
Name	Name	Name
_____ Signature	_____ Signature	 _____ Signature
_____ Date	_____ Date	<u>9/22/00</u> _____ Date

09670610-092600

## TOUCH SENSOR CONTROL DEVICES

### Background of the Invention

5           This invention relates to touch screen input devices and, more particularly, to mechanical enhancements to touch screens.

          Touch screen devices have become a commonplace user interface for electronic devices, computers, and the like. Touch screens are typically combined with a display screen which is in close proximity to the touch screen or which  
10       projects images through the touch screen. Under software control, the display may present images, video, alphanumeric information, and various combinations thereof. Moreover, the display may define corresponding areas of the touch screen as control input areas, through the presentation of control command words, iconic or graphic representations of controls, or the like. Thereafter, an operator  
15       touch at an appropriate portion of the touch screen causes the software to correlate the touch position with the control command defined by the display at that position, and to act on that command.

          Touch screen sensor devices use many different operating principles, including infrared, capacitive sensor or resistive sensor techniques. Resistive  
20       sensor screens typically establish voltage gradients across orthogonal axes, and sense the touch point based on the voltage detected at a touch point as a ratio of the gradient. Capacitive sensor screens detect a signal input at a touch point, based on the capacitive coupling of a body through the tip of the finger impinging

on the screen, or based on a signal transmitted from the tip of an input stylus.

Some capacitive touch screens are designed to be placed behind a flat panel display, with a cover glass over the display. Others must be mounted over the top surface of a flat panel display. These latter devices may require touch sensing

5 means on both the top and bottom surfaces of the touch screen, whereas others may require sensing means on only one surface, either front or back. Some touch sensor screens are capable of operation with a cover plate (superstrate) placed over the touch screen.

Touch screen technology is well adapted to eliciting operator inputs that  
10 are binary in nature: On/Off, Yes/No, Up/Down, Start/Stop, and like commands, that may be indicated with a single touch. There are other types of inputs, such as continuously variable values or functions, that many individuals prefer to control with real, palpable mechanical devices that permit a fine touch to be associated with a precisely selected level. For these inputs, a touch screen has not been well  
15 suited. Although a continuous gradient may be displayed as an image on a monitor or a flat panel display, and detected by a touch on a touch screen, it is necessary to slide the touch finger (or a stylus) along a graphic representation of a track or gradient that is displayed but lacks any physical structure or boundary. This action is difficult or awkward for many individuals, and requires that the user  
20 look at the displayed graphics in order to guide the controlling touch. In addition, many touch screens present an outer surface that is not well suited to sliding contact; e.g., the glass or plastic outer surface may lack sufficient lubricity.

The prior art reveals a lack of devices that may be used to make inputs to a system using a touch screen. On the other hand, the concept of combining electronic image display screens with operator input sensor apparatus correlated to the images presented on the display screen is well known in the prior art, as

5 exemplified by the U.S. patents issued to the present inventor:

5,572,239

5,977,955

5,805,146

5,805,145

10 5,936,613

5,774,115

00670610-093600



## Summary of the Invention

The present invention generally provides mechanical devices to enhance the input process for touch screen devices. A salient feature of the invention is the inputting of continuously variable functions or data using mechanical devices that provide the touch and feel of prior art mechanisms, such as rotary knobs, fader (slider) devices, joysticks, switches, and the like.

In one aspect, the invention provides a fader track that is adapted to be releasably secured to the outer surface of a touch screen device. The fader track may comprise a longitudinally extending rib adapted to be releasably secured to a touch screen device. The bottom surface of the rib may be provided with a releasable adhesive that enables temporary adhesion and many cycles of removal and placement. The rib may serve as a guide for a sliding finger touch on the top surface thereof, and the material forming the fader track may provide the lubricity that is often lacking in the touch surface of touch screen devices.

The fader track may also serve as a mounting for a fader cap. In this embodiment the rib is provided with a pair of flanges disposed in lateral opposition and extending longitudinally therealong. The fader cap comprises an ergonomically shaped object designed for manual engagement, and includes a portion disposed to engage the flanges in freely sliding fashion therealong. For a capacitive touch screen, the fader cap incorporates a touch signal transmitting circuit connected to a power supply, and a stylus point extending from the cap adjacent to the rib to contact the touch screen surface and deliver the touch

signal thereto. The power supply may comprise a battery, and/or a photovoltaic cell deriving power from the associated display or other light sources, or may comprise an RF or IR or other radiant energy source transmitted to a receiver in the fader cap. The fader track may also be placed in a grooved recess formed in the outer surface of the touch screen, or in a cover plate (superstrate) placed over the touch screen.

In a further embodiment, the fader track may be provided with one or more power rails extending longitudinally along the flanges thereof. The fader cap includes brush contacts that connect to the power rails, whereby the power rails may deliver a power signal or a touch signal to the fader cap. The power rails may be connected by a plug connector or the like to a power supply or signal generator, or may include connecting pads that electrically engage complementary pads on the surface of the touch screen, an adjacent circuit board, or a superstrate on the touch screen.

For a resistive touch screen device, the fader track transmits pressure from a finger touch sliding on the upper surface thereof to contact the touch screen and provoke a series of touch detections. The bottom surface of the rib that contacts the touch screen is substantially narrower than the upper surface thereof, whereby the touch pressure applied to the touch screen is amplified by the fact that the touch force is applied to the smaller area of the rib impinging on the touch screen. The bottom surface of the rib may be provided with a plurality of downward projections to further define the touch detection points.



touch screens is constructed in similar fashion, with the base diameter and post length selected to optimize angular selectivity and radial vector inputs.

In a further aspect, the invention provides a switch mechanism that is removably secured to a capacitive touch screen surface. A switch base supports  
5 a switch cap that houses a touch signal generator, and a spring interposed between the cap and base enables the user to push on the cap and urge a sensor tip to touch the screen and deliver the touch signal to the screen for detection of the touch point. As before, the power supply may comprise a battery, a photovoltaic cell, external power rails extending to the switch, or any RF or IR or  
10 other radiant energy transmitted to the switch mechanism. Software interaction with the touch point results in a switch function being carried out.

In an additional embodiment, the invention provides a joystick input device that is securable to a touch screen surface. A joystick base includes a surface defining a bottom opening, and a self-adhesive component on the surface  
15 secures the base to the touch screen. A rod extends outwardly from the joystick base, and a membrane extending from the base engages the rod and supports it in limited angular movement through a circular locus. The outer end of the rod includes a knob for manual engagement, and the inner end of the rod includes a stylus tip for engaging the touch screen. A bearing may be provided to support  
20 the rod adjacent to the stylus tip.

For capacitive touch sensing screens, the joystick base may house a touch signal generating circuit and associated power supply, as described previously.

A further aspect of the invention is the provision of a touch screen device having a resistive or capacitive sensing surface that is divided into a plurality of discrete areas. Any one of the mechanical control devices described above may be secured to respective discrete areas of the touch screen device, whereby a  
5 plurality of mechanical control devices may operate simultaneously through interaction with the touch screen device.

A further aspect of the invention is the use of multiple mechanical control devices described herein used simultaneously with a capacitive sensor touch screen device. The touch signal generator of each controller device is assigned a  
10 predetermined frequency that is unique among all the devices being used with a touch screen device. The sensing circuitry of the touch screen is adapted to receive the discrete signals of the plurality of mechanical controllers, and to evaluate the discrete signals to determine the touch point of each mechanical controller.

15 In a related aspect, the invention provides a touch sensor fader track that incorporates a touch sensor device therein, and may be used in conjunction with a display that lacks any other touch screen capability, or may be added to a touch screen device. The fader track is formed as a longitudinally extending web, and a pair of sensor electrodes are embedded in the web at longitudinally opposed ends  
20 and connected to a conductive layer or grid incorporated in the web. A longitudinally extending power rail is connected to a sensor signal generator, and the sensor electrodes are connected to electronic devices that detect a touch position on the web as a signal ratio from the electrodes. This device may be self-

adhered to the surface of a display screen, or may be placed in a groove that is formed in the surface of a display screen, cover plate, superstrate, or touch screen. In an associated embodiment, the longitudinal axis of the device may be curved into a closed loop to form a fader track that mimics the progressive angular input of a mechanical knob. In either case, the web may include a longitudinally extending groove or ridge to guide a finger touch therealong.

In a further aspect related to external touch sensor devices, the invention provides a fader control for a touch screen device that includes a flexible, ribbon-like track member secured to a structure such as a bezel or frame at or outside the margin of a touch screen device. The flexible track is extendable along an axis that that is directed inwardly with respect to the touch screen margin, and a sensor tip is mounted in the distal end of the flexible track to impart a detectable touch to the touch screen device. For a capacitive touch screen, the sensor tip is connected to a touch signal generator.

As an extension of this further aspect of the invention, the proximal end portion of the flexible track may pass about a drive wheel or sprocket which is operatively connected to a drive motor. Under software control, the motor may be driven to rotate the wheel or sprocket to extend or retract the flexible track to a preset length. Thereafter, the operator may use fingertip pressure applied to the distal end of the flexible track to further extend or retract the track, the sensor tip traversing the touch screen and imparting a moving touch point thereto.

Any of the devices described above may be placed on the active surface of a resistive or capacitive touch screen. Thereafter, the device is operated; i.e., the

knob or joystick is rotated, the fader controller is slidably actuated. The system software receives the resulting touch inputs and analyzes them to determine the location and type of device that has been operated. The invention includes software modules that receive and interpret control inputs from the devices

5 described herein, and initiate specific controller functions in response to the inputs. For example, the knob controller for resistive touch screen use may be rotated to evoke a rotary knob function response, or actuated along an orthogonal axis to evoke a fader controller response, or actuated along an oblique axis to evoke a joystick function or mouse function response.

10 The various embodiments of the invention provide the following advantages over the prior art:

1. Much lower cost. The controller devices of the invention cost much less than existing mechanical controllers for electronic use. The embodiments designed for use with resistive touch screens have no electronics at all and are

15 therefore very inexpensive. They are mechanical components which accomplish the equivalent of very complex and much more expensive knobs, faders and joysticks. The controllers for resistive touch screen use can cost pennies per unit to produce. The devices adapted for capacitive touch screen use incorporate only minimal electronics, and are also very inexpensive compared to comparable

20 stand-alone controllers known in the prior art.

2. Reduced electronic components: All of the electronics required to detect and transmit individually the movement and position of each discrete knob, fader, joystick, and the like in the prior art is replaced by one touch screen.

Thus a great amount of discrete, high resolution, expensive electronics are obviated. For use with resistive touch screens, no electronics are required in the devices of the invention. For use with capacitive touch screens, only minimal electronics that generate a touch signal at a specific frequency from the various knob, fader, or joystick controllers are required. The power consumption for these devices is minimal, far less than the comparable discrete devices of the prior art.

3. Removable devices: The controller devices of the invention (both resistive and capacitive) are removable , and may be placed on a touch screen (or cover glass) and removed many times. This aspect provides several benefits: device re-use is economical, and removable devices enable the setup of custom controller configurations in a few simple steps. Moreover, the devices may be removed at any time to clear the entire expanse of the touch screen for typical prior art touch screen functions.

4. Self activating devices: The controller devices of the invention (both resistive and capacitive) are self-activating under software control. When one of these devices is placed on a touch screen, the system software determines the location of the device on the touch screen, and the software creates a parameter window that enables the user to see the rotation (knob), fader position, or joystick envelope as a changing graphic on the display immediately below the device. The parameter window may be positioned anywhere on the display associated with the touch screen, or may be located on the display at positions related to the placement of the respective controller devices on the touch screen.



5. Economy of scale: The use of software to emulate a wide range of control functions takes advantage of a microprocessor's ability to perform repetitive tasks reliably and cheaply, and obviates the need for prior art mechanical controllers that can be very expensive, require maintenance, and may be difficult to connect.

6. The various devices described herein may be placed anywhere in the viewing area of a display or within the active surface of a touch screen, and operated, and likewise may be moved or removed by the user.

## Brief Description of the Drawing

Figure 1 is an end view of a fader track controller for use with a touch screen in accordance with the present invention.

5

Figure 2 is an end view of a further embodiment of a fader track controller for use with a touch screen in accordance with the present invention.

Figure 3 is an end view of a further embodiment of a fader track controller for use with a touch screen in accordance with the present invention.

10

Figure 4 is a cross-sectional end elevation of fader track mechanical control with fader cap for use in conjunction with a capacitive touch sensor device.

15

Figure 5 is a cross-sectional end elevation of fader track mechanical control with fader cap as in Figure 4, with a photovoltaic cell power source.

Figure 6 is a cross-sectional end elevation of fader track mechanical control with fader cap as in Figures 4 and 5, installed in a groove formed in a touch screen device.

20

Figure 7 is an end view of the fader cap and fader track devices of Figures 8-10.

Figure 8 is a plan view of a fader track mechanical control for use with a touch screen and including power rails and plug connectors for driving a touch signal generator.

Figure 9 is a plan view of a fader track mechanical control as in Figure 8, with pad connectors for signal connection to the fader track.

Figure 10 is a cross-sectional end elevation of fader track mechanical control with fader cap for use in conjunction with a capacitive touch sensor device and a cover glass (superstrate).

Figure 11 is a plan view of a knob controller for use with a resistive touch screen device.

Figures 12A – 12D are side elevations various embodiments of a knob controller for use with a resistive touch screen device.

Figure 13 is a cross-sectional elevation showing a knob controller for use in conjunction with a capacitive touch sensor device.

Figure 14 is a cross-sectional view of the knob controller shown in Figure 13.

Figure 15 is a cross-sectional elevation of a switch controller for use in conjunction with a capacitive touch screen device.

Figure 16 is a cross-sectional elevation of a fader track controller for use in conjunction with a resistive touch screen device.

Figure 17 is a cross-sectional end elevation of a fader controller for use in conjunction with a touch screen device.

Figure 18 is a cross-sectional elevation of a joystick controller for use in conjunction with a capacitive touch screen device.

Figure 19 is a cross-sectional elevation of a further embodiment of a joystick controller for use in conjunction with a capacitive touch screen device.

Figure 20 is a cross-sectional end elevation of fader track mechanical control with fader cap for use in conjunction with a capacitive touch sensor device and an OLEP or LEP display or the equivalent.

Figure 21 is a cross-sectional end elevation of knob mechanical control with fader cap for use in conjunction with a capacitive touch sensor device and an OLEP or LEP display or the equivalent.

5            Figure 22 is a plan view of a capacitive touch sensor fader controller.

Figure 23 is a plan view of a resistive touch sensor fader controller.

10           Figure 24 is an end view of the controllers shown in Figures 22 and 23.

Figure 25 is a cross-sectional end view of a resistive touch sensor fader controller incorporating a sliding fader cap.

15           Figure 26 is a plan view of a touch sensor controller formed in a closed curved loop to emulate a rotating knob function.

Figure 27 is an exploded perspective view of a flexible track fader controller for use with a capacitive touch screen device.

20           Figure 28 is a side elevation of the flexible track fader controller of Figure 27.

Figure 29 is a plan view of a resistive touch screen device having discrete sensing areas for simultaneous detection of multiple touches.

Figure 30 is a schematic view of the resistive touch screen device of Figure 29.

Figures 31-34 are plan views depicting various controller emulations for controller devices of the invention evoked under software control.

Figure 35 is an end view of a plurality of controller devices for a touch screen in accordance with the invention, provided as components on a crack-and-peel sheet.

Figure 36 is an end elevation of a further embodiment of the capacitive controller device of the invention.

## Description of the Preferred Embodiment

The present invention generally provides mechanical devices to enhance the input process for touch screen devices.

5 With regard to Figure 1, one embodiment of the invention comprises a fader track controller 41 including a longitudinally extending rib 42 having a bottom surface 43 formed longitudinally therein provided with a releasable adhesive that enables temporary adhesion and many cycles of removal and placement with respect to a touch screen or its cover glass or superstrate. The rib  
10 42 acts as a guide for a gliding finger touch to emulate the smooth longitudinal motion of a mechanical fader controller known in the prior art. The rib 42 may be formed of a lubricious plastic or polymer material that facilitates a sliding touch. The rib 42 may be placed anywhere on the touch screen surface 44, and the associated display of an electronic device may be programmed to present labeling  
15 and indicia appropriate for the desired function and range of the controller 41. The rib 42 may be removed and reused repeatedly. Note that the rib may be formed of transparent or translucent material to permit visualization of an underlying graphic display, or may be opaque, as is appropriate for the situation.

20 With regard to Figure 2, the fader track controller 41 may alternatively provide a base panel 40 that supports a rail 39 having a smoothly curved cross-sectional surface 38. The surface 38 described an angle of more than 180°, forming a smooth contour that accepts a finger touch. In addition, the cap embodiment (below) may gain purchase on the rail 39 to prevent cap removal

while permitting free sliding translation therealong. Likewise, in Figure 3 a fader track controller may provide a base panel 37 extending longitudinally, with a rib 36 extending outwardly therefrom. A pair of flanges 35 are disposed in lateral opposition and extend laterally along the rib 36. The embodiments of Figures 1-3  
5 illustrate a few possible track configurations, although many equivalent formations are possible

With regard to Figure 4, the fader track controller 41 may be modified by the addition of a sliding fader cap 53 to provide the tactile sensation of a moving object to control an input variable to a touch screen device. The cap 53 includes  
10 a pair of opposed tabs 48 extending laterally toward each other to engage therebetween the flanges 35 or 47 (or the rail 39) and retain the cap 53 in a sliding relationship on the track 41. The cap 53 incorporates a touch signal transmitting circuit 51 connected to a battery 49, and a stylus point 52 extends from the cap adjacent to the track 41 to contact the touch screen surface 46 and  
15 deliver the touch signal thereto. The cap 53 may be urged by fingertip pressure to slide along the track 41, the stylus point (also know as a sensor tip) 52 imparting the touch signal to the touch screen to provoke touch detection thereof along the track 41. (This touch detection technique is well known in the prior art.) This action provides a smooth, continuously variable control function  
20 closely akin to a mechanical fader controller device known in the prior art.

With regard to Figure 5, the device of Figure 4 may be modified by replacing the battery power supply with a photovoltaic cell 54 within the cap 53. The photovoltaic cell 54 is supported closely adjacent to the surface 44 to receive



light from the display 55 associated with the touch screen device. The cell 54 powers the signal generator 51 so that the device operates without external power connections and without the need for battery replacement. In both the embodiment of Figures 4 and 5, the touch screen device 56 is connected to touch screen circuitry common in the art that detects the touch signal and its location, and transfers this data to a computer processor connected to graphic display 55 to carry out a control, command, or input function. (Note that the track 41 may be fabricated of light-transmitting material, and also the relative widths of the track 41 and photovoltaic cell 54 are not necessarily to scale.)

In all the embodiments of the invention in which adhesive or self-adhesive materials are mentioned, it is presumed that the adhesive is preferentially more adherent to the device of the invention rather than the touch screen, display screen, cover glass, or the like.

With reference to Figure 6, the embodiment of Figure 5 (and Figure 4) may be installed in a grooved recess 57 in the surface 44 of the touch screen device 56 that is associated with a graphic display 55.. Likewise, these embodiments may be in a grooved recess of a cover plate or superstrate placed over the touch screen device 56. Likewise, as shown in Figure 10, the embodiments of Figures 4 and 5 may be secured on the outer surface of a cover glass (superstrate) 58 which is placed over the touch screen device 56 and an associated graphic display 55. Also, any knob embodiment described herein may be installed in a grooved recess similar to that shown in Figure 6.

With regard to Figures 7-9, the invention also includes a fader track controller 61 having a longitudinally extending web track 41. A pair of power rails (conductors) 62 extend longitudinally in the upper surface of the track 41, and a fader cap 53 assembled to the track 41 includes a pair of contacts 63 for electrically engaging the power rails 62 and providing power to the touch signal generator 51. (The power rails may be placed in any surfaces of the track 41.) Other aspects of this embodiment remain as described previously. As shown in Figure 8, a pair of connector pins 64 joined to the power rails may extend from one end of the rib 41 to connect to a power cable or the like.

Alternatively, as shown in Figure 9, a pair of connector pads 66 joined to the power rails may be formed at one end of the track 41. For some embodiments more than two power rails may be provided. The connector pads 66 may connect to a plurality of power conductors 67 disposed on a circuit board 68 located at or proximate to the periphery 69 of the touch screen. The electrical engagement of the pads 66 with the conductors 67 permits the device of Figure 9 to be placed at any location along the conductors 67. Furthermore, multiple devices may be placed on the touch screen at any desired spacing and powered by the conductors 67. Alternatively, conductors may be placed on the surface of a touch screen device or on a superstrate placed over a touch screen device. The use of power rails and connector pins or pads may be combined where appropriate with any of the embodiments described in this application.

With regard to Figures 11 and 12A-12F, the invention provides a knob controller 71 for operation with a resistive touch screen device. The knob

controller 71 includes a generally cylindrical component 72 (in Figures 12A-12D) having a releasable adhesive 73 on the flat bottom surface thereof that is adapted to removably secure the knob on the surface 74 of a resistive touch screen device. The upper surface 76 of the component 72 is designed to invite finger touch, and may be slightly roughened to prevent the finger from slipping. The adhesion of the base to the touch screen does not provoke a touch response.

As shown in Figure 12A, fingertip pressure P applied eccentrically at the upper surface 76 causes the corresponding lower edge of the member 72 to impinge sharply on the touch screen surface 74 and provoke a touch detection T.

Likewise, as shown in Figure 11, fingertip pressure P applied along a peripheral edge portion of the upper surface results in the corresponding lower edge provoking touch responses throughout the angular span A, which may be easily associated by software with the rotation of a mechanical knob controller known in the prior art. The peripheral edge touch in a circular fingertip motion is a natural gesture, and an operator may input an angular excursion ranging from a small angle to several rotations about the axis of the knob. Note that the knob itself does not rotate, but the touch it provokes on the touch screen device appears to rotate. The scale associated with one rotation of the knob may be selected so that the device 71 may be used to input within a wide range (several rotations), or with extreme precision within a defined range.

With regard to Figure 12B, an alternative embodiment of Figure 12A includes similar components having the same reference numeral with a prime(') designation. The lower surface of the knob 72' is provided with a cylindrical

recess 77 in which an adhesive layer 78 is secured. The adhesive layer is preferably slightly greater in height than the depth of the recess 77, so that the lower peripheral edge portion of the knob 72' is spaced minimally from the surface 74 of the resistive touch screen device. The top surface 76' is dished to  
5 accommodate the convex curvature of a fingertip. Fingertip pressure as described above drives the thin lower peripheral edge of the knob 72' into the touch screen to provoke a touch detection that may have a smaller, sharper detection area.

With regard to Figure 12C, an alternative embodiment of Figure 12A-12B  
10 includes similar components having the same reference numeral with a prime(') designation. The lower surface of the knob 72' is provided with a cylindrical recess 77 in which an adhesive layer 78 is secured, as before. In addition, the dished upper surface 76' is provided with a soft cushion layer 79 for enhanced tactile sensation and to protect the finger by providing a yielding surface for  
15 tactile engagement.

With regard to Figure 12D, an alternative embodiment of Figure 12A-12C includes similar components having the same reference numeral with a prime(') designation. The upper surface of the knob is provided with a rocker plate 70, a disk-like structure having a central post 75 snap-engaged in a central opening in  
20 the top of the knob 72'. The disk is spaced slightly above the top surface 76' of the knob, and the snap-engagement permits free angular movement of the rocker plate. Thus fingertip pressure applied to the top of the rocker plate 70 causes it to wobble about the axis of the central post 75. The wobble motion enhances the

effectiveness of an off-center finger touch to drive the lower peripheral edge of the knob into the touch screen.

With regard to Figures 12E and 12F, an alternative embodiment of Figure 12A-12C includes similar components having the same reference numeral with a prime(') designation. In Figure 12E, the knob is formed in a mushroom configuration 60 having a relatively wide base that receives the recess 77 and adhesive 78, a narrow stem, and an upper crown wider than the stem but narrower than the base. In Figure 12F, the knob is provided with a mushroom configuration 65 having a relatively wide crown and a narrower stem, with the bottom surface of the stem receiving the recess 77 and adhesive 78. In either case the crown may be formed of a soft plastic, rubber, or other yielding material to cushion the finger touch.

With regard to Figures 13 and 14, the invention also provides a knob controller 81 for use with a capacitive touch screen. The knob controller 81 includes a base 83 secured to the outer surface of a touch screen 82 (or a cover plate) by a suction cup device 84, although releasable adhesive may be used equally effectively. A knob cap 86 is rotatably secured to the base 83, and includes a sensor tip (stylus tip) 85 extending from the cap 86 toward the touch screen. A compression spring 89 may be interposed between the cap and the sensor tip to bias the tip to impinge on the touch screen 82. A touch signal generator 87 is disposed within the cap 86, as well as a battery power supply 88.

The sensor tip 85 transmits the touch signal from generator 87 to the screen 82 to provoke a touch detection. Angular movement of the knob 86

causes the sensor tip 85 to move over the touch screen in an arcuate path which is detected and converted to angular excursion and speed of movement for control input purposes. As in previous embodiments, the knob power supply may comprise a photovoltaic cell to derive power from the associated display, RF, IR, or equivalent radiant power transmission, or conductors extending to the knob controller 81. The system software may recognize the loop traced by the tip 85, determine the center, and cause the associated display to present a knob graphic, or other representation of the rotary knob controller. Movement of the touch detection along an arcuate path is interpreted by the software as a change in the variable or function associated with the knob, and that changing variable may be displayed alphanumerically or graphically at any location on the associated display, or at a location proximate to the graphic representation of the knob on the display.

With regard to Figure 15, the invention further provides a switch controller 91 for use with a capacitive touch screen 92. The controller 91 includes a base 93 adhered (by any means disclosed herein) to the outer surface of the touch screen 92, and a switch cap 94 secured to the base in vertically translatable fashion. A touch signal generator 96 and power supply 97 are disposed within the cap 94, the signal generator being connected to a stylus tip 99 that extends from the cap toward the touch screen 92. A spring 98 resiliently biases the cap away from the touch screen and maintains the stylus tip out of contact with the touch screen. Fingertip pressure on the knob cap overcomes the spring force and urges the stylus tip to impinge on the touch screen and provoke a touch detection.

Software interaction with the touch point results in a switch function being carried out. Although a touch screen may be tapped directly with a fingertip to mimic a switch function, the embodiment of Figure 15 may have utility in situations where an individual is wearing gloves (in a laboratory or industrial setting, for example) and touch detection is problematic, or where manual contact with the screen would soil the screen surface.

With regard to Figure 16, a fader controller 111 for a resistive touch screen includes a longitudinally extending track 112 having a configuration functionally similar to the embodiments of Figures 1-3. A releasable adhesive is applied to the bottom surface of the track 112 to removably secure the device 111 to the outer surface 114 of a touch screen assembly. The bottom surface of the track 112 may further include a plurality of downwardly projecting feet 113 that impinge on the touch screen surface. The feet tend to increase the pressure (force per unit area) within a small footprint on the touch screen, enhancing the touch detection on resistive touch screens.

With reference to Figure 17, any of the track configurations 41 of Figures 1-3 may be applied to surface 114 of a resistive touch screen. Fingertip pressure P on the top surface tends to rock the track 41 about its longitudinal axis, driving one edge of the lower rib into the screen and amplifying the touch pressure by applying it to a small screen area. This effect is also operative in conjunction with those capacitive sensing touch screen devices that respond differentially to applied pressure.

With regard to Figure 18, the invention also provides a joystick controller 122 for use with a capacitive touch screen 123 associated with a graphic display 120. A base 124 is adhered to the surface of the screen 123 (by any means disclosed herein), and defines a bottom opening adjacent to the screen 123. A control rod 126 includes an outer end having a knob for manual engagement, and an inner end having a telescoping tip 127 that is spring biased to contact the screen 123. The rod 126 is secured in a universal bearing 128, and a membrane 125 extends radially from an upper portion of the rod 126 to the base 124 to permit limited angular excursions of the knob and complementary angular excursions of the tip 127 on the touch screen 123. A touch signal generator 129 is secured in the base and is connected to the tip 127, and a battery power source 131 is connected to the signal generator. The telescoping tip 127 maintains contact with the touch screen as the knob end is moved through angular excursions about the bearing axis.

With regard to Figure 19, a further embodiment of the joystick controller 122' includes similar components similarly numbered. The bearing is replaced by another membrane 132 extending radially from a lower end portion of the rod 126, and the telescoping tip is likewise eliminated. The two membranes permit angular movement of the rod 126, and also permit downward force applied manually to urge the fixed tip to impinge on the touch screen and impart a touch point or a touch path thereto.

Both embodiments described in Figures 18 and 19 provide a high resolution joystick input function for a capacitive touch screen, a function that



may be only crudely emulated by a moving fingertip touch on the touch screen. Moreover, the device 122 creates a joystick input without requiring the user to look at the display 120, whereas any (prior art) virtual joystick portrayed on the display 120 demands visualization by the user for accurate use. This requirement  
5 is akin to an automobile driver being required to watch the steering wheel rather than the road and oncoming traffic.

In any of the embodiments described herein in which a touch signal generator feeds a signal to a stylus tip to provoke a touch detection, it is noted that the stylus tip need be only in close proximity to the surface of the touch  
10 screen device, and may not actually impinge on the surface. This aspect reduces wear on the touch screen, and reduces the potential for scratching the surface of the touch screen.

The devices described herein may also be used with OLED and LEP and equivalent displays, which are typically very thin. With reference to Figure 20, an  
15 OLED or LEP display 133 is secured adjacent to the outer surface of a capacitive touch screen device 134. (A layer of protective material may be disposed on the display.) A fader track controller as shown and described in Figure 4 or elsewhere is removably secured to the outer surface of the display 133, with the stylus tip 52 thereof extending to the surface of the display 133. The touch signal from the  
20 stylus tip 52 is transmitted through the display 133 to the touch screen 134 to provoke a touch detection. One advantage of this arrangement is that the parallax associated with the thickness of a touch screen that is placed on top of a

display, as known in the prior art, is eliminated by having the display on top of the sensing screen..

OLED and LEP displays and the like can have their bus bars printed on a plastic substrate by a special ink jet printing process. This same printing process may be used to print conductor traces directly on the top surface or bottom surface of the display web. With reference to Figure 21, a display 133 is secured to a touch screen device 134 as described with reference to Figure 20. A knob controller 136 includes a base 137 releasably adhered to the outer surface of display 133. A knob cap 138 is rotatably secured to the base, and a touch signal generator 139 within the cap is connected to a stylus tip 141 extending toward the display 133. A plurality of conductors 142 are printed on the display 133, and contacts on the bottom surface of the base 137 engage the conductors to power the signal generator 139. The traces may be coated with a thin protective polymer or equivalent as is common in the construction of touch screens. As described above, rotation of the cap 138 with the stylus 141 provokes a touch detection along the arcuate path of the stylus, and software interprets the arc length and velocity to form an input function for an associated computer or electronic device. The conductors 142 may be printed in discrete areas of the display 133, or may extend over the entire surface. The conductors may be placed at predetermined spacings to enable the connection of multiple devices 136 or other devices described herein. Note that no onboard battery or photovoltaic power supply is required for these devices.

With regard to Figure 22, the invention provides a fader controller 143 that employs a capacitive touch sensing technique. Controller 143 includes a longitudinally extending web 144 formed of a material such as plastic, glass, metal, polymer, and the like. ("Web" is used herein to indicate a flat, thin, generally bendable sheet.) A pair of sensor electrodes 146 and 147 are secured to opposed ends of the web 144, and a coating 148 of transparent conductive material such as indium tin oxide (ITO) may be applied to the web 144 on the top surface, bottom surface, or within the web. Alternatively, a touch grid can be embedded in the web or applied to its surface, extending between the sensor electrodes. One or more power rails 149 (which may comprise thin conductors) extend longitudinally in the web and connect to the sensor electrodes. The sensor electrodes are connected to touch sensor circuitry and thence to a microprocessor. The touch sensor circuitry may be disposed adjacent to a graphic display on which the device 143 is placed, such as the display frame or bezel, or merely connected at the periphery of the display to touch sensor circuitry mounted elsewhere.

A finger touch at any point along the web 144 causes signals to be imparted to the sensors 146 and 147, and the ratio of these signals is interpreted by the software running on the microprocessor to detect the longitudinal position of the touch. A sliding touch along the web generates many touch points in sequence, and the extent and movement of the touch points may be interpreted as input commands to the microprocessor. Thus the controller 143 comprises a fader controller, with a sliding finger touch providing the control input. This

sliding finger touch replaces the fader cap in mechanical faders known in the prior art.

The device 143 is fabricated of transparent materials, and may be adhered to the surface of a display, such as a flat panel display, CRT, OLED or LEP, Active Matrix, STN, or electroluminescent display. Thus touch sensor devices may be applied to a computer display that is otherwise devoid of touch input technology. Likewise, device 143 may be adhered to a cover glass, a superstrate surface, or the surface of a touch screen device. It may be installed in a groove in any of these named devices or surfaces. The advantages of this device include the following:

1) the device 143 eliminates the need for a fader cap, while at the same time providing a physical tactile device for operating a fader. There is no fader cap to wear out, nor to inflict wear on a fader track. It is easy to use a material that is much harder than human skin, so that wear on the web 144 is minimal;

2) the device 143 eliminates the need for a motorized fader. The fader cap is eliminated, and likewise the need to move a fader cap is obviated. A graphic representation of the fader position may be visualized through the transparent material of the web 144, and software may be used to move the representation to a preset value as well as changing the position in accordance with any finger touch. Thus the need for service and repair of motorized faders is eliminated;

3) the device 143 enables the user to operate the fader controller by touch alone, freeing the vision of the user for other tasks.

With regard to Figure 23, the invention further provides a fader controller 152 that employs a resistive touch sensor technique. A longitudinally extending

web 154 is formed of a material such as plastic, glass, metal, polymer, and the like. A pair of contacts 156 and 157 are secured to opposed ends of the web 144, and a resistive/conductive grid 158 is embedded in the web and extending between the sensor electrodes. The contacts are each connected to touch sensor circuitry and thence to a microprocessor. A finger touch at any point along the web 154 causes a voltage signal to be detected by sensors located external to controller 152 and electrically connected to contacts 156 and 157. The ratio of these signals is interpreted by the software running on the microprocessor to detect the longitudinal position of the touch. A sliding touch along the web generates many touch points in sequence, and the extent and movement of the touch points may be interpreted as input commands to the microprocessor. The advantages enumerated previously with respect to the embodiment of Figure 22 also pertain to this embodiment.

To guide the sliding touch along the longitudinal extent of the web 144 or 154, the device may provide a ridge 149 protruding upwardly from the web 144 (or indented into the web) and extending longitudinally thereon, as shown in Figure 24. The ridge 149 may include a shallow V shaped groove 151 extending longitudinally therealong. The ridge 149 serves as a finger guide to permit an individual to slide a fingertip along the axis of the web 144 without requiring visual guidance to orient the sliding touch. The groove 151 serves as a guide for the tip of a stylus or pen for the same purpose.

With regard to Figure 26, any of the embodiments of Figures 22-24 may be configured in a closed curved loop 161 to define a touch sensor controller that

emulates the circular rotation of a knob controller. A finger touch may describe a small angular excursion about the central axis, or may encompass many rotations about the central axis, and the relationship of the angular increment to the input variable may be set by a software function to provide any degree of resolution or range of a variable.

With reference to Figure 25, a further embodiment 159 of the invention includes a fader cap 160, constructed as described previously, to engage a track 41 secured to the outer surface of a display 143. A device 152 is secured to the upper surface of the track 41. A stylus tip 162 extends from an edge portion of the cap 160 to impinge on the top of the device 152 to provoke a touch response from the device. The user may place one or more fingers on the cap 160 and slide the cap along the track 41 to perform a control function, and the feel of the controller is very similar to a mechanical fader controller known in the prior art. The device 159 may be applied to a graphic display or to a touch screen associated with a graphic display.

With regard to Figures 27 and 28, the invention further provides a fader controller 163 for a generalized touch screen device 164 that is mounted at the periphery of the touch screen device 164. A flexible track 166 includes a proximal end having a conductor 167 supported therein, the conductor extending the length of the track to a cap end 168. A stylus tip 169 extends from the cap 168 toward the touch screen 164. The track 166 extends through a half-loop bend within a housing 171 at the margin of the screen 164, and a keeper 172 within the housing serves as a guide to maintain the axial alignment of the track

166 as it is extended or retracted in the housing 171. The conductor may carry a touch signal to the tip 169, which in turn provokes a touch response from the touch screen 164. The keeper may also influence the angle at which the track 166 engages the screen 164 to assure that the tip 169 impinges on the touch screen.

5           The track 166 may be provided with a smooth, toothed or ribbed surface 173 that is passed about a drive sprocket 174. A motor 176 connected to the drive sprocket is controlled by a software function to rotate and drive the flexible track 166 to extend or retract to any preset length representing any given value. Thereafter, the operator may use fingertip pressure applied to the end cap of the  
10 flexible track to further extend or retract the track, the stylus tip traversing the touch screen and imparting a moving touch point thereto. For use with electronic display devices that have no touch screen associated therewith, the extension and retraction of the track 166 may be sensed by a shaft encoder or the  
15 movement and position into a display graphic that tracks the position of the cap end 168. This technology is described in copending application no. 09/551,484, filed April 18, 2000 by the present inventors.

          The device of Figures 27 and 28 comprises a mechanical fader controller that requires no structure mounted on a touch screen, yet is capable of interacting  
20 with a touch screen. There are no alterations required for the touch screen or display, nor any adhesives used on their surfaces. The track 166 may be made of a transparent material to enhance visibility therethrough. The added motor drive provides a fully motorized fader controller, as is known in the prior art, though the

motor drive is not required for operation. For use with a resistive touch screen, the sensor tip may extend from the flexible track a sufficient distance to comprise the primary bearing point of the track on the screen.

A further aspect of the invention is the provision of touch screen devices  
5 modified to detect a plurality of discrete touch points simultaneously, whereby a plurality of the various controller devices described herein may be used in conjunction with a single touch screen, and more than one controller may be employed at the same time. With regard to Figures 29 and 30, a touch screen assembly 181 provides a plurality of discrete sensing areas 182 and 183 (and  
10 more, as necessary) within a single touch screen within a bezel 185. The touch screen assembly is associated with a display that is controlled by a processor that receives inputs from the touch screen. The sensing areas are separated by a boundary zone 184 that is not touch sensitive. Each sensing area may host one of the touch screen controller devices described above that is adapted for use  
15 with a resistive touch screen. In this way multiple controllers may be used with a single touch screen and a single display.

The resistive touch screen employs a conductive, transparent layer extending between sensing electrodes, as in generally known and used in the prior art. With reference to Figure 30, sensing area 182 is bounded by a pair of  
20 electrodes 186 spaced apart in the Cartesian X direction and a pair of electrodes 187 spaced apart in the Y direction. Likewise, the sensing area 183 is bounded by electrodes 189 and 188 in the X and Y directions. The boundary zone 184 between the adjacent electrodes 187 and 188 may be minimized by forming the



electrodes as microtraces in the screen material, and by software modeling that combines the touch sensing of both areas in a seamless manner, so that a moving touch may be passed from one area to the other without interruption. Thus the overall touch screen assembly 181 appears to contain a single touch screen, with  
5 the added feature that each sensing area may support a respective separate controller of this invention, and all such controllers may be detected and operated simultaneously. A greater plurality of sensing areas may be provided for larger numbers of controllers. It is noted that this same technique of placing multiple sets of sensor electrodes for multiple areas within a single touch screen  
10 assembly may be applied to capacitive touch screen devices.

Additionally, for capacitive sensor touch screen devices, a plurality of mechanical controllers designated for capacitive touch sensors as described above may be operated simultaneously in accordance with the invention. The system employs multiple discrete band (MDB) RF touch position determination  
15 system (TPDS). The MDB TPDS includes four identical multi-band RF transmitter/detector units disposed symmetrically at the margin of the capacitive touch screen. The transmitter/detector units are all capable of resolving discrete RF bands. The touch signal generator of each controller is assigned a predetermined frequency within a respective discrete band that is unique among  
20 all the devices being used with a touch screen device. The transmitter/detector units are adapted to receive the discrete signals of the plurality of mechanical controllers, and to evaluate each discrete signal to determine the touch point of each mechanical controller. The number of devices used is limited only by the

filter bandwidth and the processing power of the electronic interface. An alternative to this approach is to use discrete bands of IR (infrared light) rather than RF. Each device emits a signal within a discrete IR band, and the sensing receivers are filtered to distinguish the signals in each band.

5           A further aspect of the invention is the software that may be used to interpret and carry out control inputs that are entered using the devices described herein. With regard to Figure 31, the devices described herein, particularly those depicted in Figures 11 and 12, may be used in any of several ways. Whenever a knob controller 71 (or 71') is placed (self-adhered) on a touch screen device, the

10   user initiates operation of the controller by actuating it in any of several particular ways to evoke a respective controller function. For example, as shown in Figure 11 and 31, when the device 71 is placed on resistive touch screen 201 and initiated with a series of circular finger motions, the touch screen device 201 detects a plurality of touch points in a plurality of loop paths 202. The software

15   running on the associated computer system uses the loop patterns 202 to calculate the center position of the placement of a knob on the touch screen. When the device is located by the center of its placed location being determined, any number of functions for this device can be selected in a menu or by selection graphics or alphanumeric indicia that are generated by the display in relative

20   proximity to the device 71. An example of four such functions are: rotary knob, directional knob, joystick, and mouse controller.

Regarding the rotary knob function, initial circular movements of the knob are used to determine its location. Subsequent circular movements of the knob

are converted by software into increases or decreases in the value associated with the knob, with the magnitude of the angular excursion correlated with the magnitude of the change in value. The changing value may be displayed by indicia and/or graphic means. If circular rotations to the right are converted into value increases, then circular rotations to the left are converted into decreases, and vice versa.

Using the calculated center position of a placed device 71, software can place any type of graphics near or around the knob. These graphics may include an emulated light ring 204, a device name or label, and/or a parameter (numerical value) that changes when the device is operated. Thus, for example, any circular finger touch on the controller 71 will cause the knob pointer 206 of the graphic representation 203 to rotate about the band 204. This in turn causes the value of the parameter assigned to the device to increase or decrease.

The rotary operation of knob controller 71 is well suited for operations in which each 360° motion is equal to a predetermined amount of value change. Portions of a circle or small arcs can yield touch points that can be converted through software to small angle changes in value. Or, the amount of change that is represented by a single 360° circular motion can be changed to a wide range of values. For instance, the scale may be set so that one complete circle about the controller 71 equals 1/10<sup>th</sup> of a decibel, or may be set so that one complete circle equals 10 decibels.

As another example, with regard to Figure 32, the device 71 is placed on resistive touch screen 201 and the directional knob function is selected. Finger

touches that are generally linear and back and forth along orthogonal axes generate very few touch detections. The placement of device 71 is detected by the same method as described previously. The device is operated by pushing up or down (north/south) or right or left (east/west). A northward push on the knob

5 71 provokes a touch detection displaced from the calculated center position of the controller, and the software recognizes this action as a command to increase the value of the parameter. The increase in the parameter is proportional to the amount of time that the northward touch is maintained. Likewise, a southward push on the knob causes the software to decrease the parameter value.

10 In addition, the user may initiate a northward push to increase the parameter value, and then rotate the touch toward the east position, the rate of increase of the parameter value is reduced. If the rotated touch continues toward the southern quadrant, the parameter value begins to decrease, and reaches a maximum rate of decrease when the touch rotates to the south position. Note that

15 the choice of directions for increase/decrease is arbitrary, and may be selected for convenience and compatibility. The software causes the display to present a graphic representation 208 that indicates a directional knob function, the parameter label, and its current value.

With regard to Figure 33, a further function that may be evoked during

20 initiation of a device is a joystick. As with the other functions of device 71, when the device is first placed on the display 201, a series of circular motions are performed and the touch detections thus provoked are interpreted by the software to calculate the center of the location of the device 71. Thereafter the

joystick function is selected from an on-screen menu (or the equivalent, for example, a vocal command), and the software directs a graphic representation 213 closely spaced to the calculated center of device 71.

5 The graphic representation 213 may include an enclosed box or figure 216, a joystick knob symbol 214, and functional indicia ("Joystick Active") and the parameter or value being controlled ("Label") and its current value. Any suitable graphic or iconic symbol may be used. As the user applies finger pressure to the device 71 in any direction, the touch detection 212 provoked thereby is displaced from the calculated center, and the angle of the displaced touch is used  
10 to move the knob representation 214 in the same angular direction on the display. Movement of knob 214 (or a cursor or other object controlled by the joystick) is set at a fixed speed by the software, and this speed may be changed by menu selection or the like. In this regard the embodiment is analogous to a switch joystick function known in the prior art. Alternatively, the software may be set so  
15 that the speed of movement in any angular direction is proportional to the amount of time that the knob 71 is pushed in any direction.

As an alternative embodiment to Figure 33, the linear oblique initial inputs may be correlated to evoke a mouse function, in which a cursor may be driven to any point of the associated display. A graphic representation 217 may be  
20 presented with a label ("Mouse Active") that sets forth the function.

In all the embodiments of Figures 31-34, the software applies a mathematical function that correlates any excursion of the touch points from the average center position, including the angle about the center position, and the

distance and time of the excursion, with changes in the labeled value or parameter. This function may be linear or nonlinear, bounded or unbounded, as is appropriate for the item being controlled. The software changes the position of the graphic display as appropriate. It is significant that the software enables one  
5 controller 71 to perform all four controller operations: rotary knob, directional knob, joystick, and mouse controller. Although the device 71 is adapted for use with resistive touch screens, the software functions described above may be applied to controller devices described herein for use with capacitive touch screens.

10 The selection of various functional controller emulations, as in Figures 31-34, using initiating movement of a newly placed controller, may be applied where appropriate to any of the fader, knob, or joystick controllers described herein.

The various embodiments of controller devices described herein are generally designed to interact with touch screen devices, and to be simple,  
15 inexpensive assemblies that rely on the touch screen and associated software for functionality and resolution. With regard to Figure 35, the controller devices of the invention may be provided as a group of devices 220, here representing any of the controller devices described herein (all the same or a variety selection of knobs and faders, etc.) The devices 220 are secured to a common scrim 221 that is  
20 scored at separating lines 222. The scrim 221 may incorporate the self-adhering base component of the respective knob, fader track, joystick, or the like. The user may separate a device from the group along a scored line 222, and peel away a bottom release layer 223 to expose the adhesive. The separated device may then

be applied directly to a touch screen device and used as described herein. This is termed crack-and-peel packaging. Each device may be removed from a touch screen and reused many times, and ultimately discarded.

With regard to Figure 36, there is shown a further enhancement to the controller devices described herein that are intended for use with capacitive touch screens. Such devices that are powered by a battery 49 have an operating life limited by the energy stored in the battery. To extend the operating life to the maximum, a switch 225 is placed in the surface of the controller that receives the user's touch. The switch 225 is connected between the battery 49 and the touch signal generator 51, and assures that power is drawn from the battery 49 only when the operator is actively using the fader cap. The switch 225 may be mechanical, or may comprise a solid state touch sensor, which draws minimal current, as is known in the prior art.

The controller devices for use with touch screens as described herein exhibit the following advantages over the prior art:

1. These devices cost far less to manufacture than prior art controllers, because they require either a very simple electronic circuit or no circuit at all, depending on the implementation of the device.

2. Many of the embodiments herein do not require any type of edge connector to be operational, and thus may be placed anywhere on the surface of a display, touch screen or its cover glass. These embodiments permit faders and knobs to be placed in the middle of the touch screen, rather than requiring placement adjacent to the edge of a touch screen.

3. Many of these devices may be operated with no conductors of any kind connected thereto.

4. These devices require no dedicated circuit for converting analog signals to digital signals. This conversion is performed by the touch sensor circuitry that is part of the touch screen.

5. There are no complex mechanical parts in the controllers to require maintenance or to fail.

6. Many of these controller devices for touch screens, including fader tracks, may be presented on crack-and-peel sheets, a very inexpensive means of marketing the product.

7. These controller devices may be removed and replaced at will on the surface of a touch screen or its equivalent.

8. One touch screen device and one software package replace a large number of expensive, discrete electromechanical controllers, resulting in the same functionality at far less cost.

The foregoing description of the preferred embodiment of the invention has been presented for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed, and many modifications and variations are possible in light of the above teaching without deviating from the spirit and the scope of the invention. The embodiment described is selected to best explain the principles of the invention and its practical application to thereby enable others skilled in the art to best utilize the invention in various embodiments and with various modifications as suited to the



particular purpose contemplated. It is intended that the scope of the invention be defined by the claims appended hereto.

Variable	Mean	Standard Deviation	Minimum	Maximum
Age	35.2	12.5	18	65
Gender	0.45	0.50	0	1
Marital Status	0.65	0.48	0	1
Education	12.5	2.5	9	16
Income	45000	15000	20000	80000
Health	0.75	0.43	0	1
Smoking	0.35	0.48	0	1
Alcohol	0.25	0.44	0	1
Exercise	0.55	0.50	0	1
Stress	0.65	0.48	0	1
Sleep	0.75	0.43	0	1
Appetite	0.65	0.48	0	1
Mood	0.55	0.50	0	1
Energy	0.65	0.48	0	1
Concentration	0.55	0.50	0	1
Memory	0.65	0.48	0	1
Emotion	0.55	0.50	0	1
Behavior	0.65	0.48	0	1
Thought	0.55	0.50	0	1
Feeling	0.65	0.48	0	1
Perception	0.55	0.50	0	1
Attention	0.65	0.48	0	1
Intuition	0.55	0.50	0	1
Imagination	0.65	0.48	0	1
Reasoning	0.55	0.50	0	1
Logic	0.65	0.48	0	1
Analysis	0.55	0.50	0	1
Synthesis	0.65	0.48	0	1
Evaluation	0.55	0.50	0	1
Comparison	0.65	0.48	0	1
Classification	0.55	0.50	0	1
Organization	0.65	0.48	0	1
Planning	0.55	0.50	0	1
Problem Solving	0.65	0.48	0	1
Decision Making	0.55	0.50	0	1
Communication	0.65	0.48	0	1
Interpersonal Skills	0.55	0.50	0	1
Teamwork	0.65	0.48	0	1
Leadership	0.55	0.50	0	1
Management	0.65	0.48	0	1
Coordination	0.55	0.50	0	1
Organization	0.65	0.48	0	1
Planning	0.55	0.50	0	1
Problem Solving	0.65	0.48	0	1
Decision Making	0.55	0.50	0	1
Communication	0.65	0.48	0	1
Interpersonal Skills	0.55	0.50	0	1
Teamwork	0.65	0.48	0	1
Leadership	0.55	0.50	0	1
Management	0.65	0.48	0	1
Coordination	0.55	0.50	0	1
Organization	0.65	0.48	0	1
Planning	0.55	0.50	0	1
Problem Solving	0.65	0.48	0	1
Decision Making	0.55	0.50	0	1
Communication	0.65	0.48	0	1
Interpersonal Skills	0.55	0.50	0	1
Teamwork	0.65	0.48	0	1
Leadership	0.55	0.50	0	1
Management	0.65	0.48	0	1
Coordination	0.55	0.50	0	1
Organization	0.65	0.48	0	1
Planning	0.55	0.50	0	1
Problem Solving	0.65	0.48	0	1
Decision Making	0.55	0.50	0	1
Communication	0.65	0.48	0	1
Interpersonal Skills	0.55	0.50	0	1
Teamwork	0.65	0.48	0	1
Leadership	0.55	0.50	0	1
Management	0.65	0.48	0	1
Coordination	0.55	0.50	0	1
Organization	0.65	0.48	0	1
Planning	0.55	0.50	0	1
Problem Solving	0.65	0.48	0	1
Decision Making	0.55	0.50	0	1
Communication	0.65	0.48	0	1
Interpersonal Skills	0.55	0.50	0	1
Teamwork	0.65	0.48	0	1
Leadership	0.55	0.50	0	1
Management	0.65	0.48	0	1
Coordination	0.55	0.50	0	1
Organization	0.65	0.48	0	1
Planning	0.55	0.50	0</	

## Claims

1. A device for providing input to a touch screen, including:

a base member and means for securing said base member to the touch

5 screen;

means associated with said base member for provoking a touch detection  
by the touch screen.

2. The device for providing input to a touch screen of claim 1, wherein

10 said base member includes a longitudinally extending rib having a bottom surface  
adapted to impinge on the touch screen.

3. The device for providing input to a touch screen of claim 2, wherein said  
rib is sufficiently flexible to be deflected by a fingertip touch at an outer surface

15 of said rib and said bottom surface is likewise deflected to provoke a touch  
detection.

4. The device for providing input to a touch screen of claim 2, wherein said  
rib is formed of a material sufficiently lubricious to enable a sliding touch along

20 said rib.

5. The device for providing input to a touch screen of claim 3, further including a fader cap, and means for securing said fader cap to said rib in longitudinally sliding fashion.

5           6. The device for providing input to a touch screen of claim 5, wherein said means for securing said fader cap includes at least one flange extending longitudinally along said rib, said fader cap including a structural element adapted to engage said flange in freely sliding fashion.

10           7. The device for providing input to a touch screen of claim 5, further including a stylus tip extending from said cap toward said touch screen.

15           8. The device for providing input to a touch screen of claim 7, wherein the touch screen is adapted to detect the position of a touch signal applied thereto, said fader cap including means for generating said touch signal and transmitting said touch signal through said stylus tip to said touch screen.

20           9. The device for providing input to a touch screen of claim 8, further including power supply means in said fader cap for driving said touch signal generator.

          10. The device for providing input to a touch screen of claim 9, wherein said power supply means includes a battery.

11. The device for providing input to a touch screen of claim 9, wherein said power supply means includes a photovoltaic cell.

5           12. The device for providing input to a touch screen of claim 9, wherein said power supply means includes at least one power rail extending along said rib and electrically accessible by said touch signal generator in said fader cap.

10           13. The device for providing input to a touch screen of claim 12, further including at least one conductive trace extending to said base member and connected to said at least one power rail.

15           14. The device for providing input to a touch screen of claim 6, further including a pair of flanges disposed in lateral opposition and extending longitudinally along said rib.

20           15. The device for providing input to a touch screen of claim 13, further including a fader cap, said means for securing said fader cap including structural elements to engage said pair of flanges and retain said fader cap on said rib in freely sliding fashion.

16. The device for providing input to a touch screen of claim 2, further including a plurality of closely spaced feet projecting from said bottom surface of said rib to engage the surface of a touch screen device.

5           17. The device for providing input to a touch screen of claim 1, wherein said means for securing includes an adhesive layer formed on a bottom surface of said base member.

10           18. The device for providing input to a touch screen of claim 17, said adhesive layer being preferentially more adherent to said base member than to the surface of a touch screen device.

15           19. The device for providing input to a touch screen of claim 1, wherein a plurality of said devices are provided, said plurality of devices being joined in a crack-and-peel sheet.

20           20. The device for providing input to a touch screen of claim 1, wherein said base member comprises a post having a bottom surface adapted to impinge on the touch screen.

21. The device for providing input to a touch screen of claim 20, further including a knob cap secured coaxially to said post and adapted for rotation about a common axis.

22. The device for providing input to a touch screen of claim 21, further including a stylus tip extending from said knob cap toward said touch screen.

5           23. The device for providing input to a touch screen of claim 22, wherein the touch screen is adapted to detect the position of a touch signal applied thereto, said knob cap including means for generating said touch signal and transmitting said touch signal through said stylus tip to said touch screen.

10           24. The device for providing input to a touch screen of claim 23, further including power supply means in said knob cap for driving said touch signal generator.

15           25. The device for providing input to a touch screen of claim 1, further including an RF power supply means includes a battery.

26. The device for providing input to a touch screen of claim 24, wherein said power supply means includes a photovoltaic cell.

20           27. The device for providing input to a touch screen of claim 24, wherein said power supply means includes a conductive trace extending to said base member.

28. The device for providing input to a touch screen of claim 1, further including power supply means for operating said means for provoking a touch detection, said power supply means includes means for transmitting RF power wirelessly to said device.

5

29. The device for providing input to a touch screen of claim 1, further including power supply means for operating said means for provoking a touch detection, said power supply means includes means for transmitting IR power wirelessly to said device.

10

30. The device for providing input to a touch screen of claim 1, further including a groove formed in the touch screen, said base member being received and recessed in said groove.

15

31. The device for providing input to a touch screen of claim 30, wherein said device includes a knob controller.

32. The device for providing input to a touch screen of claim 30, wherein said device includes a fader track.

20

33. The device for providing input to a touch screen of claim 30, wherein said device includes a joystick.

34. The device for providing input to a touch screen of claim 20, further including a computer having a graphic display associated with the touch screen, and software means for receiving touch input provoked by said post with fingertip pressure.

5

35. The device for providing input to a touch screen of claim 34, said software means including means for analyzing touch inputs provoked by said post with fingertip pressure and emulating specific diverse controller characteristics in response to said touch inputs.

10

36. The device for providing input to a touch screen of claim 35, wherein said software means includes menu selections to elicit selection of various controller emulations related to said post.

15

37. The device for providing input to a touch screen of claim 35, said software means including means for analyzing initial touch inputs provoked by said post with fingertip pressure and determining the center point of said initial touch inputs.

20

38. The device for providing input to a touch screen of claim 37, wherein said software means further places a graphic symbol on said graphic display corresponding to the center point location ascribed to said post



39. The device for providing input to a touch screen of claim 38, wherein said graphic symbol further portrays a controller function.

40. The device for providing input to a touch screen of claim 35, wherein  
5 said software means provides a fader controller emulation and interprets generally linear touch pattern along a defined axis as a command to change the value of a parameter associated with the fader controller emulation.

41. The device for providing input to a touch screen of claim 37, wherein  
10 said software means provides a joystick controller emulation and interprets a linear touch pattern at any angle from said center point as a command to move a graphic at the same angle on the display.

42. The device for providing input to a touch screen of claim 41, wherein  
15 the rate of movement of the graphic is set by said software means.

43. The device for providing input to a touch screen of claim 41, wherein the rate of movement of the graphic is proportional to the amount of time that a touch detection is maintained at any given angle.

20

44. The device for providing input to a touch screen of claim 37, wherein said software means provides a mouse controller emulation and interprets a touch

detection displaced from said center point at an angle thereabout as a command to move a cursor at the same angle on the display.

45. The device for providing input to a touch screen of claim 1, further  
5 including a plurality of said devices, said touch screen including means for detecting simultaneous operation of said plurality of devices.

46. The device for providing input to a touch screen of claim 45, wherein  
10 each of said plurality of devices includes means for generating a touch signal and transmitting said touch signal through a stylus tip to said touch screen.

47. The device for providing input to a touch screen of claim 46, wherein  
each means for generating a touch signal of each respective device operates  
within a respective discrete frequency or wavelength band.

15 48. The device for providing input to a touch screen of claim 47, wherein said means for detecting simultaneous operation includes multiple discrete band RF touch position determination means.

20 49. The device for providing input to a touch screen of claim 47, wherein said means for detecting simultaneous operation includes multiple discrete wavelength IR touch position determination means.

50. The device for providing input to a touch screen of claim 47, wherein each of said multiple discrete bands of said touch determination means corresponds to one of said discrete frequency or wavelength bands of said plurality of means for generating touch signals.

5

51. The device for providing input to a touch screen of claim 50, wherein said multiple discrete band RF touch position determination means includes a plurality of multi-band RF transmitter/detector units disposed about the touch screen.

10

52. The device for providing input to a touch screen of claim 49, wherein said multiple discrete band IR touch position determination means includes a plurality of multi-band IR transmitter/detector units disposed about the touch screen.

15

53. The device for providing input to a touch screen of claim 45, wherein said touch screen includes resistive touch detection means, and further includes a plurality of discrete sensing areas.

20

54. The device for providing input to a touch screen of claim 53, wherein said plurality of discrete sensing areas are in contiguous arrangement within a single touch screen.

55. The device for providing input to a touch screen of claim 54, wherein each of said sensing areas is bordered by sensing electrodes that locate a touch within the respective sensing area.

5           56. The device for providing input to a touch screen of claim 54, wherein at least one of said plurality of devices is operable in a respective one of said sensing areas.

10           57. The device for providing input to a touch screen of claim 20, said post including a recess formed in said bottom surface, and an adhesive layer disposed in said recess.

15           58. The device for providing input to a touch screen of claim 57, wherein said adhesive layer is greater in thickness than the depth of said recess, and a peripheral edge portion of said bottom surface is disposed in minimally spaced apart disposition to the touch screen.

20           59. The device for providing input to a touch screen of claim 20, wherein said post includes a top surface having a contoured configuration.

          60. The device for providing input to a touch screen of claim 20, wherein said post includes a top surface having a cushion layer adhered thereto.

61. The device for providing input to a touch screen of claim 20 wherein said post includes a top surface, and further including a rocker plate secured at said top surface.

5           62. The device for providing input to a touch screen of claim 61, wherein said rocker plate includes a lug projecting from a medial portion thereof, and a central opening in said top surface dimensioned to receive said lug in snap-engaged, freely rotating fashion, said rocker plate being spaced apart from said top surface and rockable about said lug in any direction.

10           63. The device for providing input to a touch screen of claim 20, wherein said post includes a mushroom configuration having a crown supported on a narrow stem.

15           64. The device for providing input to a touch screen of claim 63, wherein the bottom surface of said stem is secured to the touch screen.

20           65. The device for providing input to a touch screen of claim 20, said post including a base and a distal end, and said distal end is wider than said base.

          66. The device for providing input to a touch screen of claim 65, said post including a base and a distal end, and said base is wider than said distal end.

67. The device for providing input to a touch screen of claim 1, wherein said base member defines a bottom opening, a control rod having a lower end with a stylus tip, and means for supporting said control rod on said base member with said stylus tip spaced closely to the touch screen to provoke a touch  
5 detection.

68. The device for providing input to a touch screen of claim 67, said means for supporting said control rod including a universal bearing engaging a medial portion of said control rod.  
10

69. The device for providing input to a touch screen of claim 68, further including a membrane extending radially from said control rod to said base member, said membrane formed of an elastic, resilient web.

70. The device for providing input to a touch screen of claim 67, said means for supporting said control rod including a first membrane extending radially from a medial portion of said control rod to said base member, said first membrane formed of an elastic, resilient web.  
15

71. The device for providing input to a touch screen of claim 70, further including a second membrane extending radially from an upper end of said control rod to said base member, said second membrane formed of an elastic, resilient web.  
20

72. The device for providing input to a touch screen of claim 68, said stylus tip being mounted in telescoping fashion in said lower end of said control rod, and resilient means for biasing said stylus tip to extend toward the touch  
5 screen.

73. A capacitive touch sensor controller, including:  
a web extending longitudinally;  
a pair of sensor electrodes secured to longitudinally opposed ends of said  
10 web;  
a conductive layer secured to said web;  
at least one power rail extending longitudinally along said web between  
said sensor electrodes;  
software means connected to said sensor electrodes for determining the  
15 position of a touch point on said web.

74. The touch sensor controller of claim 73, wherein said software means includes means for emulating a fader controller in response to sliding touch on  
said web.

75. The touch sensor controller of claim 73, further including a guide ridge extending longitudinally on said web and disposed to guide a sliding touch longitudinally therealong.

76. The touch sensor controller of claim 75, further including a groove extending longitudinally in said guide ridge to guide a stylus in sliding translation therealong.

5

77. The touch sensor controller of claim 75, further including a fader cap slidably secured to said guide ridge.

78. The touch sensor controller of claim 77, further including a stylus tip  
10 extending from said fader cap toward said longitudinal web.

79. The touch sensor controller of claim 78, further including a touch signal generator disposed in said fader cap and connected to said stylus tip.

80. A resistive touch sensor controller, including:  
15 a web extending longitudinally;  
a pair of electrical contacts secured to longitudinally opposed ends of said web;  
a conductive layer secured to said web;  
20 software means connected to said electrical contacts for determining the position of a touch point on said web as a function of said signals.



81. The touch sensor controller of claim 80, wherein said software means includes means for emulating a fader controller in response to sliding touch on said web.

5           82. The touch sensor controller of claim 81, further including a guide ridge extending longitudinally on said web and disposed to guide a sliding touch longitudinally therealong.

10           83. The touch sensor controller of claim 80, wherein said longitudinal web is curved into a closed loop emulative of circular knob rotation.

84. A device for providing input to a touch screen having a peripheral edge, including:

15           a flexible track mounted at the peripheral edge of the touch screen, said flexible track being extendable along an axis extending inwardly on said screen; and,

            means for detecting extension and retraction of said flexible track with respect to the peripheral edge of the touch screen and correlating the extension and retraction with a controller function.

20

85. The device for providing input to a touch screen of claim 84, wherein said means for detecting includes a stylus tip extending from a distal end of said

flexible track toward the touch screen, and means for connecting said stylus tip to a touch signal generator.

86. The device for providing input to a touch screen of claim 85, wherein  
5 said means for connecting includes at least one flexible conductor extending along said flexible track.

87. The device for providing input to a touch screen of claim 84, wherein  
said means for detecting includes a spindle about which said flexible track is  
10 passed, and means for sensing rotation of said spindle and converting said rotational data into location coordinates of said cap end of said flexible track.

88. The device for providing input to a touch screen of claim 87, wherein  
said spindle includes radial teeth, and said flexible track includes a toothed  
15 surface adapted to engage said radial teeth.

89. The device for providing input to a touch screen of claim 87, further  
including motor means for driving said spindle to extend and retract said flexible  
track with respect to the peripheral edge of the touch screen.

20

90. The device for providing input to a touch screen of claim 84, further  
including keeper means for directing said flexible track along said axis.

91. The device for providing input to a touch screen of claim 90, wherein said keeper means includes means for maintaining contact of said cap on the touch screen.

5           92. The device for providing input to a touch screen of claim 10, wherein said fader cap includes touch switch means for connecting said battery to said touch signal generator in response to fingertip touch on said fader cap.

10           93. The device for providing input to a touch screen of claim 25, wherein said knob cap includes a touch switch for connecting said battery to said touch signal generator in response to fingertip touch on said knob cap.

## Abstract of the Disclosure

The invention provides mechanical devices to enhance the input process for touch screen devices. Fader tracks with or without fader caps, rotary and  
5 fixed knobs, and joysticks may be removably adhered to a touch screen and used to emulate their respective functions, using software interpretation of the touch detections provoked by the devices to carry out the emulations. The devices are inexpensive and simple, and the touch screen and associated software provide the function and feel of electromechanical controllers that are far more expensive  
10 and difficult to connect and maintain. The devices may be provided as components on a crack-and-peel sheet. For fixed knobs, the software application accepts initial inputs and determines the location on the touch screen, and also interprets the geometry of the input strokes as commands for selected controller emulations, such as joystick, fader, knob, or mouse. The invention also provides a  
15 touch sensor controller having a longitudinal web that incorporates touch sensor electrodes and conductors and emulates a fader controller. The invention further provides a flexible track controller mounted at the periphery of a touch screen and extendable thereover to emulate a fader controller. The flexible track may be motor driven.



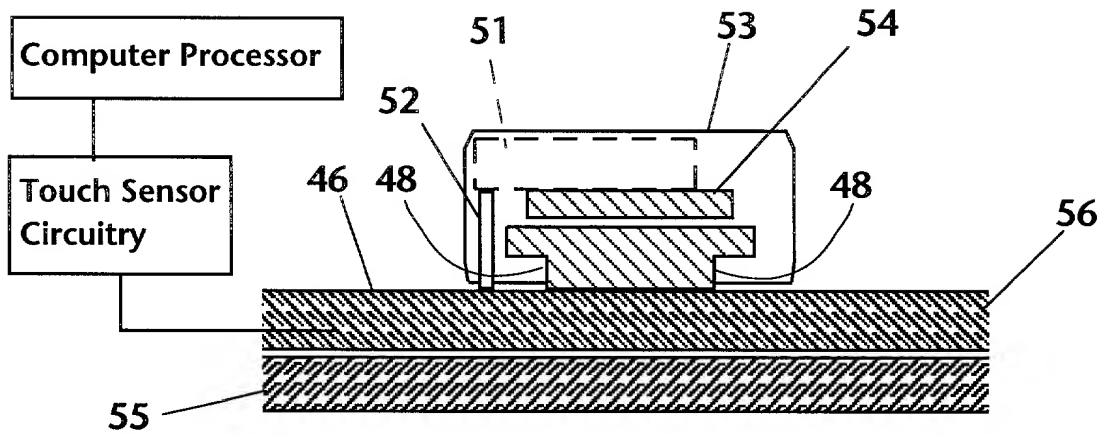


FIG. 5

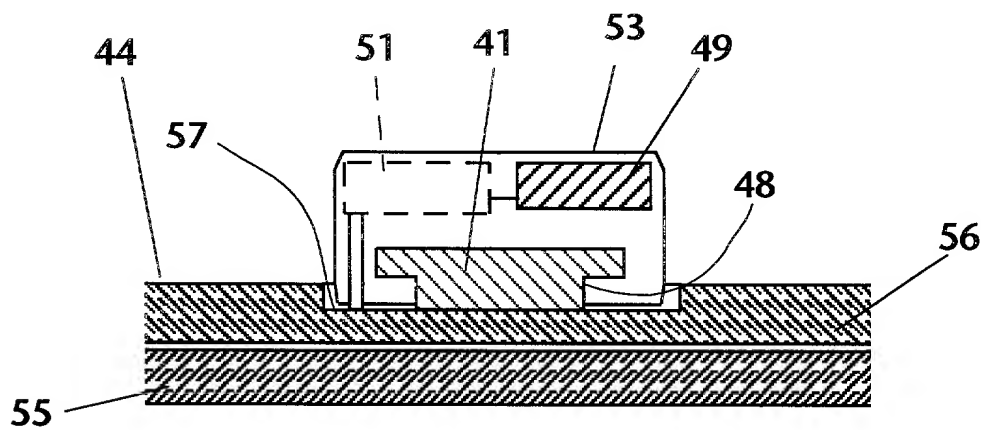


FIG. 6

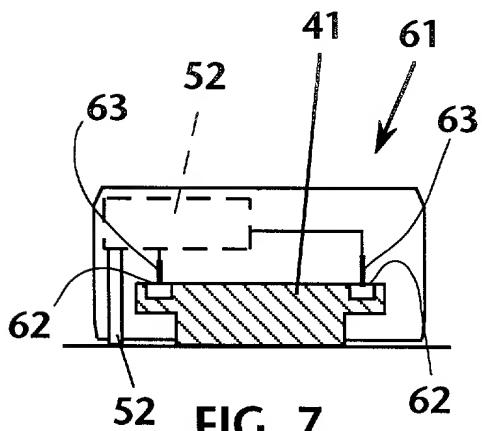


FIG. 7

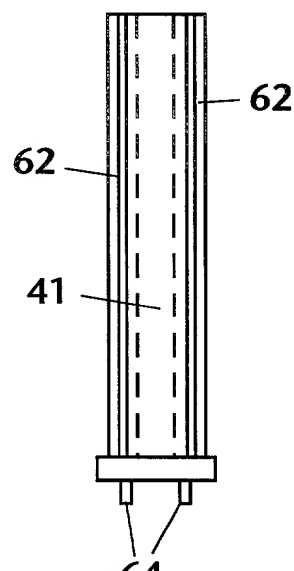


FIG. 8

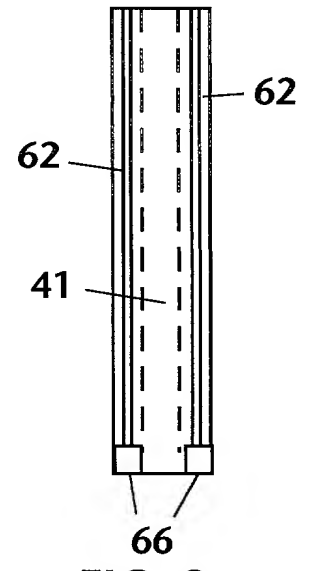


FIG. 9

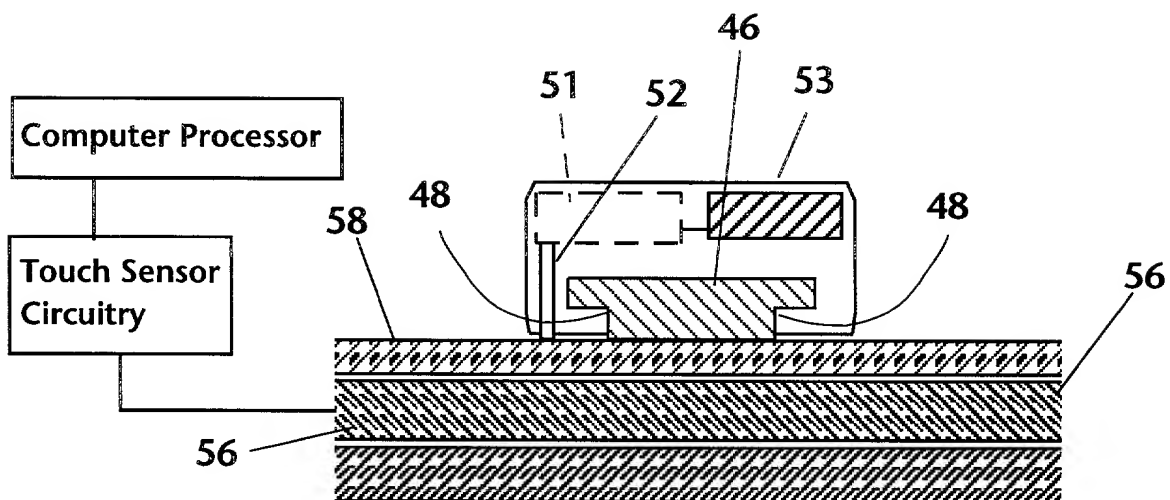


FIG. 10

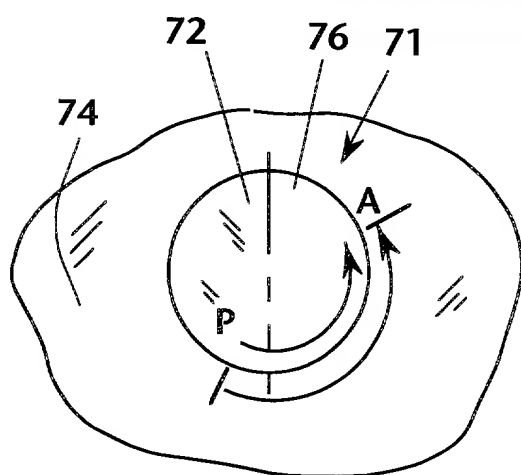


FIG. 11

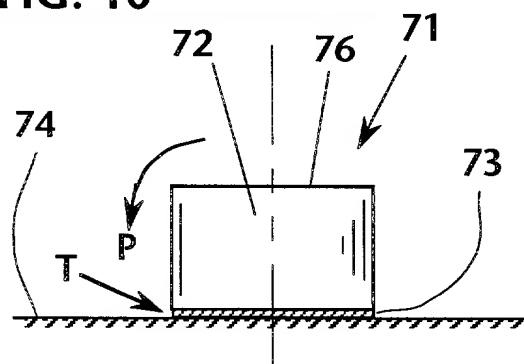


FIG. 12A

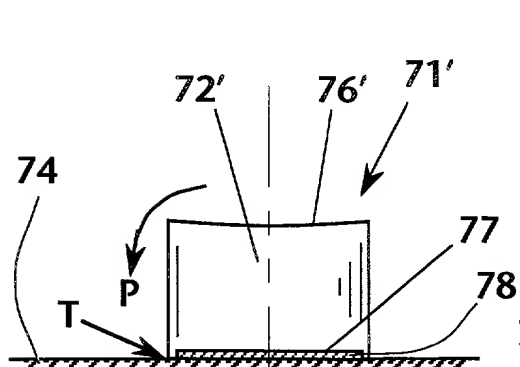


FIG. 12B

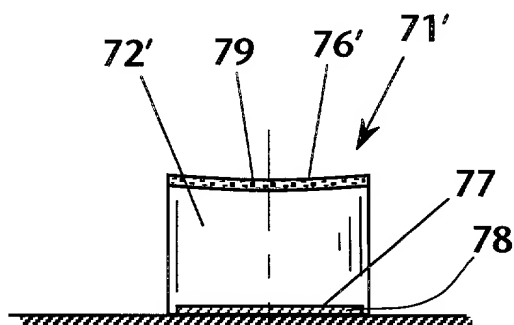


FIG. 12C

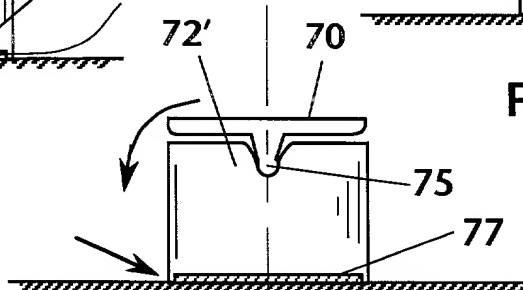


FIG. 12D

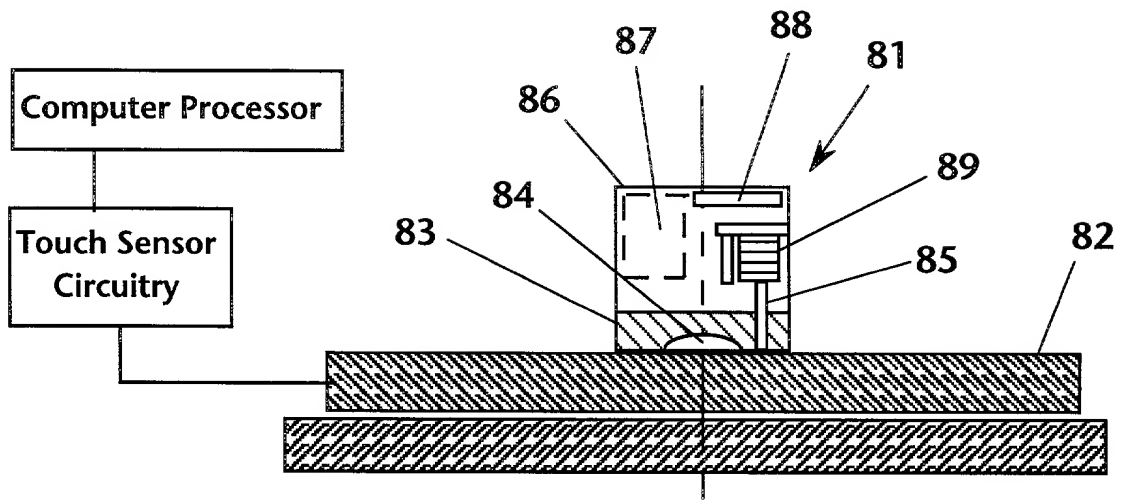


FIG. 13

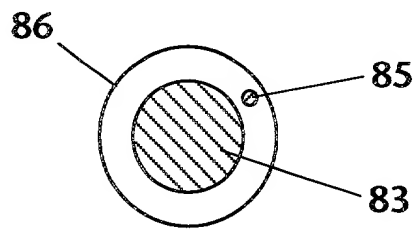


FIG. 14

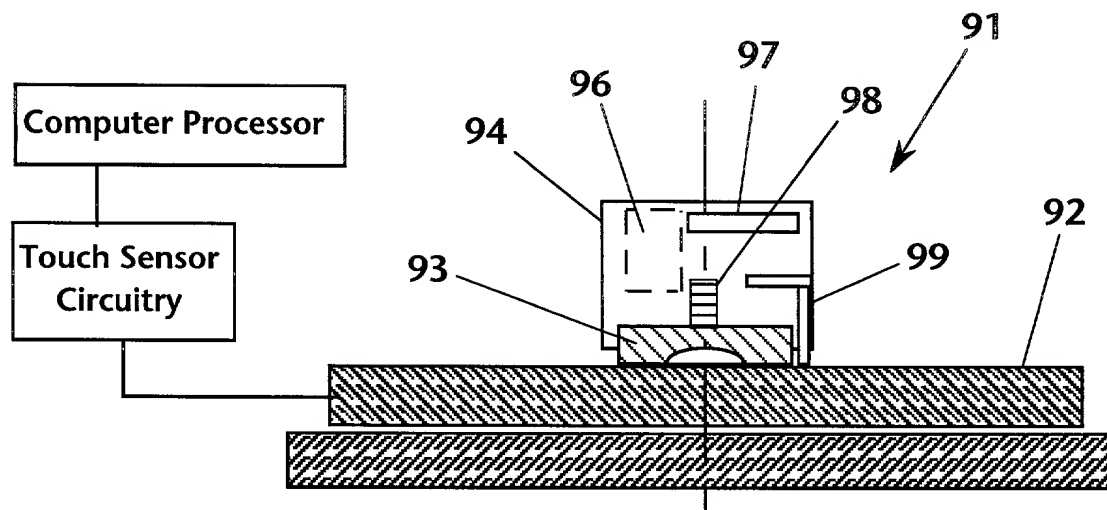


FIG. 15



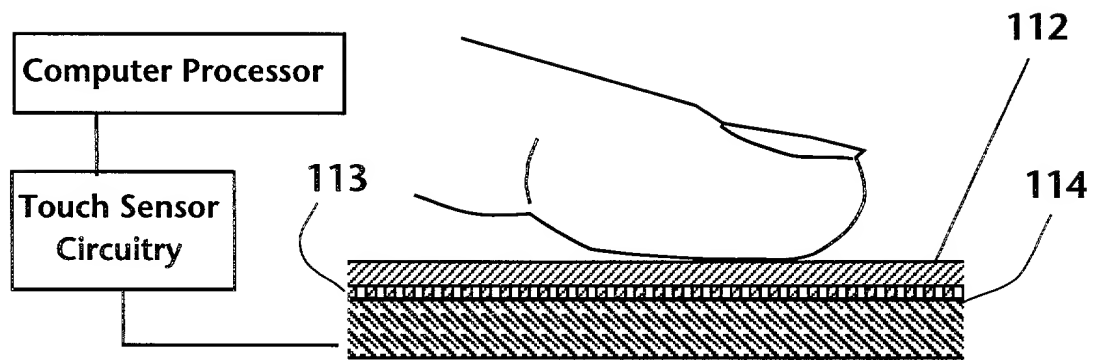


FIG. 16

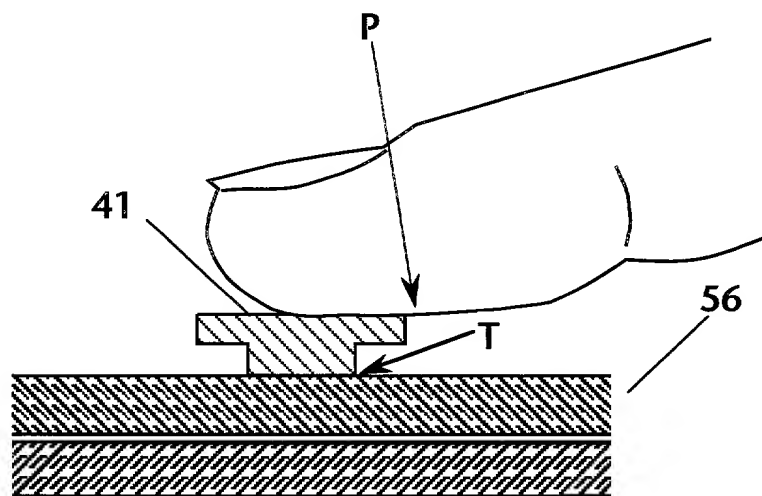


FIG. 17



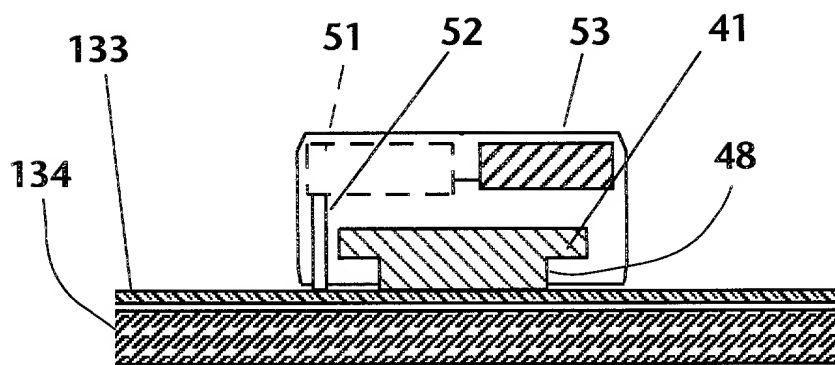


FIG. 20

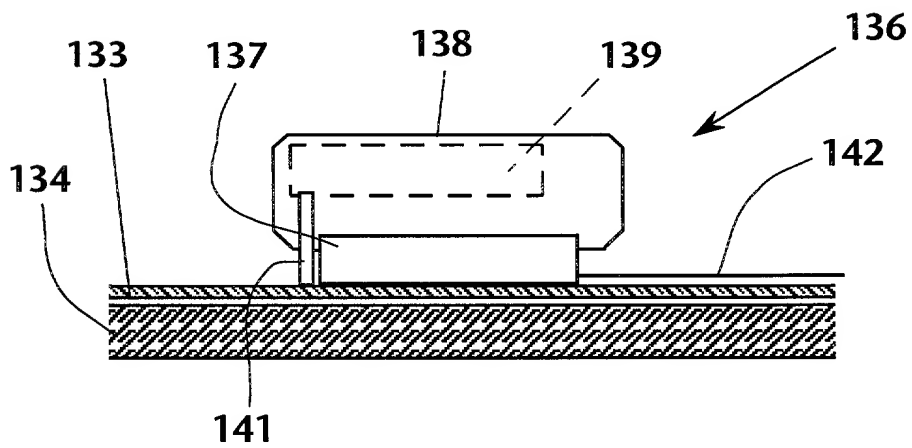


FIG. 21

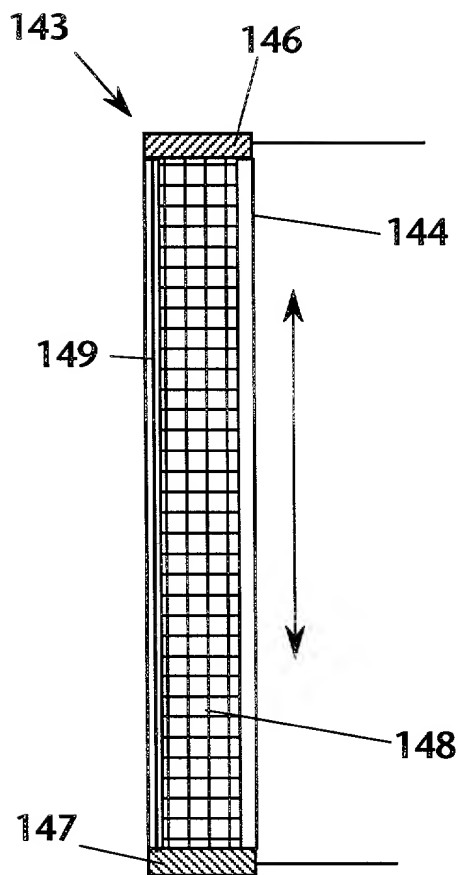


FIG. 22

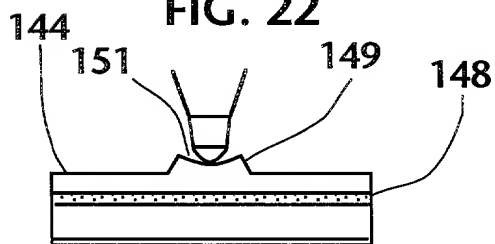


FIG. 24

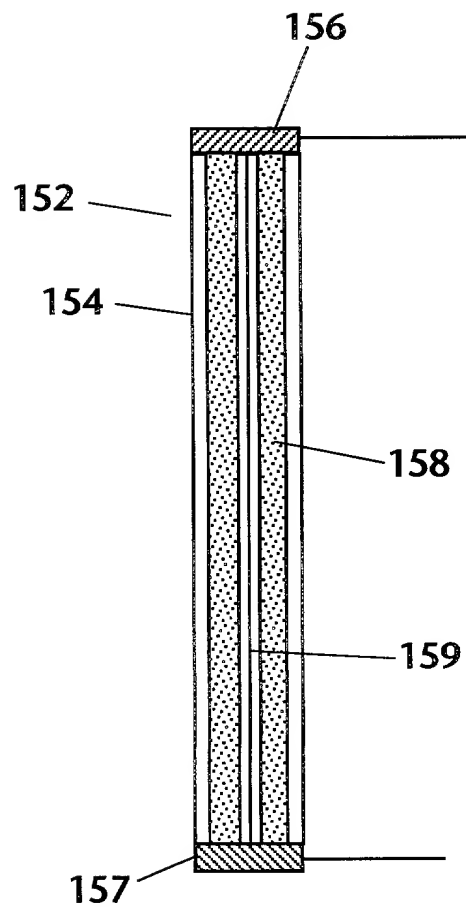


FIG. 23

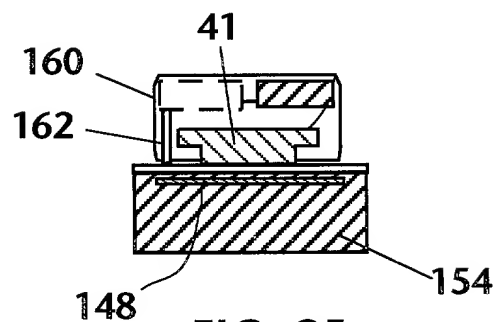


FIG. 25

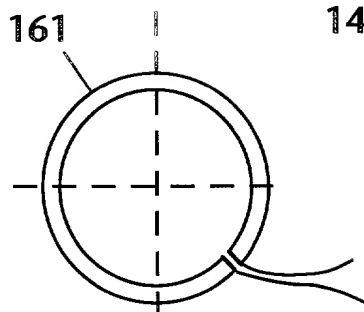
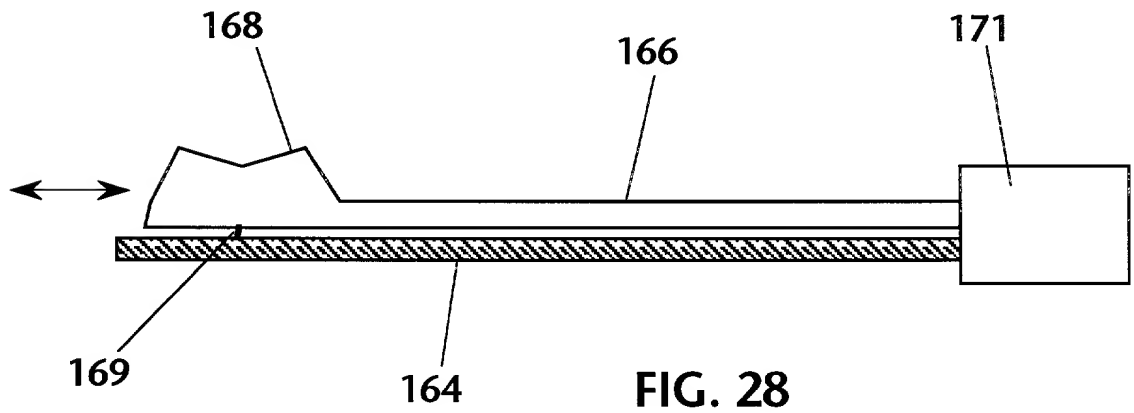
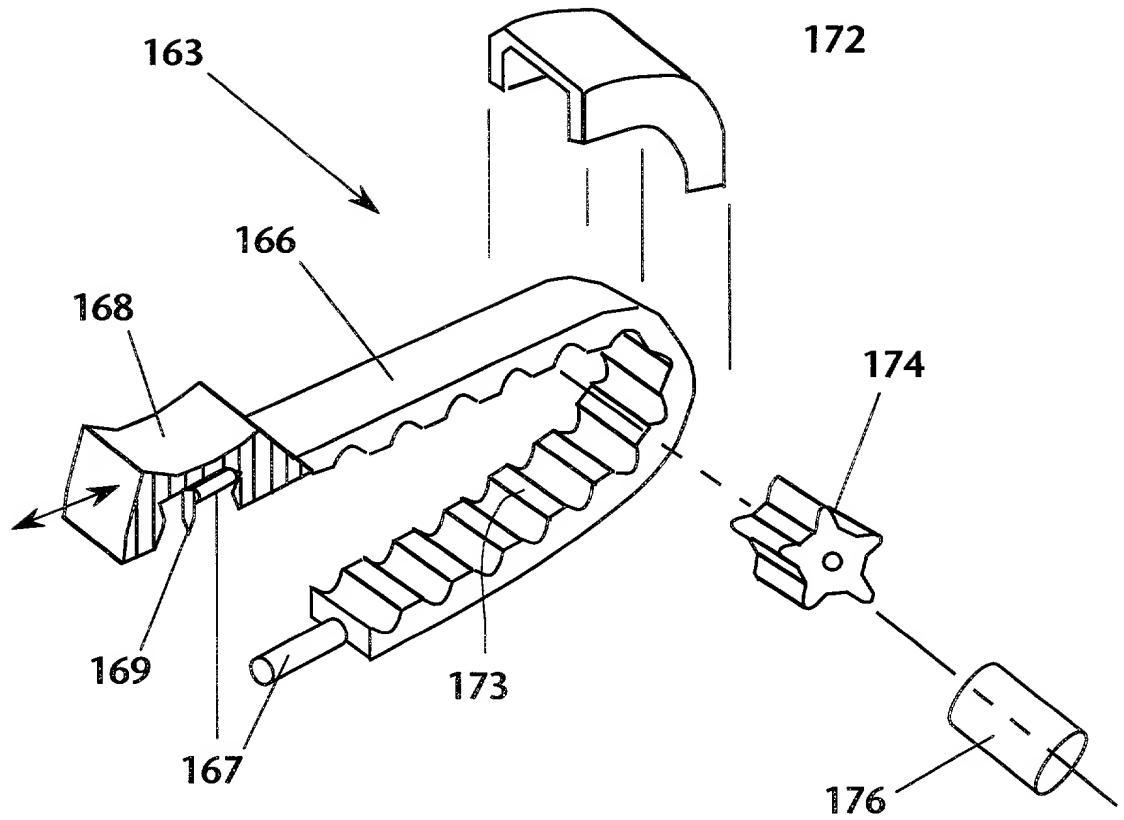


FIG. 26



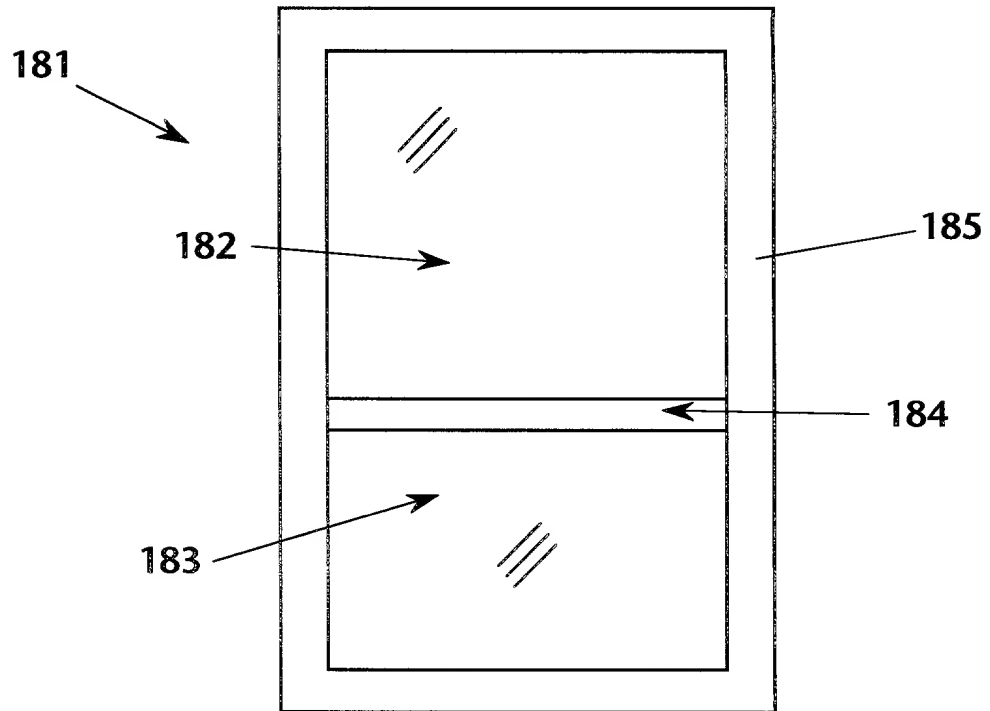


FIG. 29

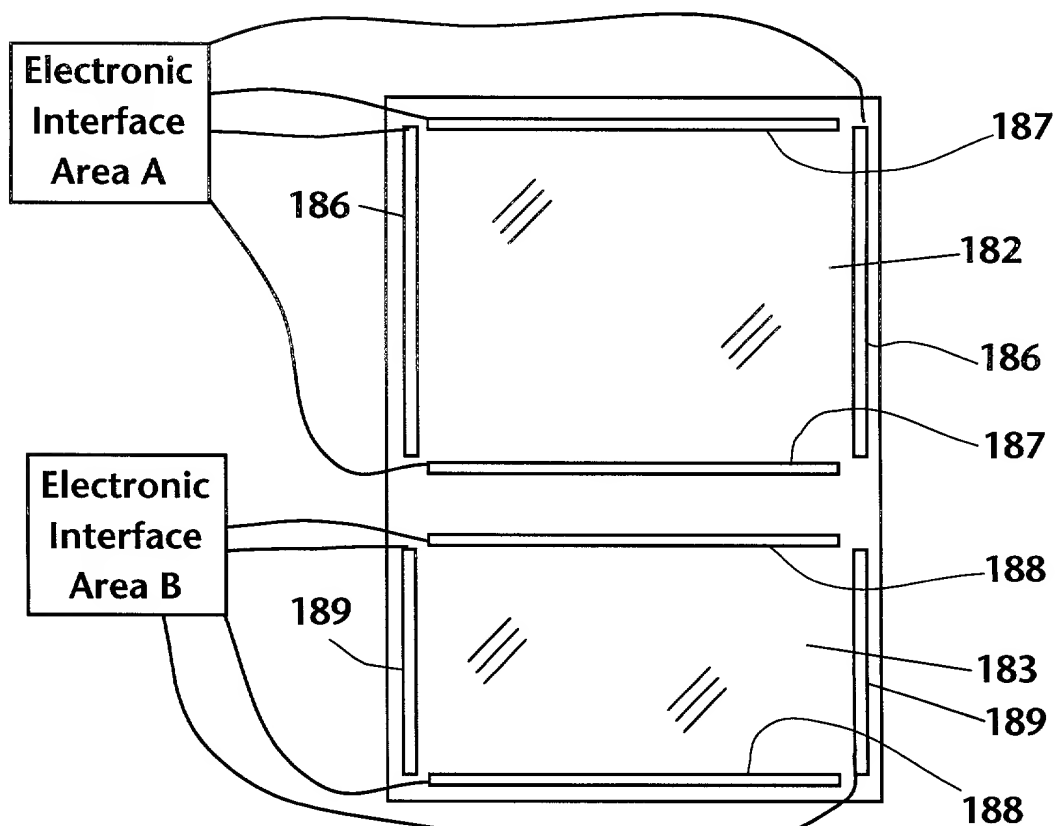


FIG. 30

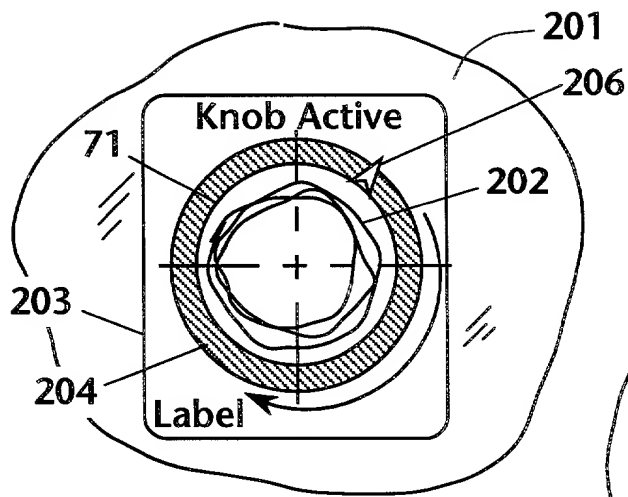


FIG. 31

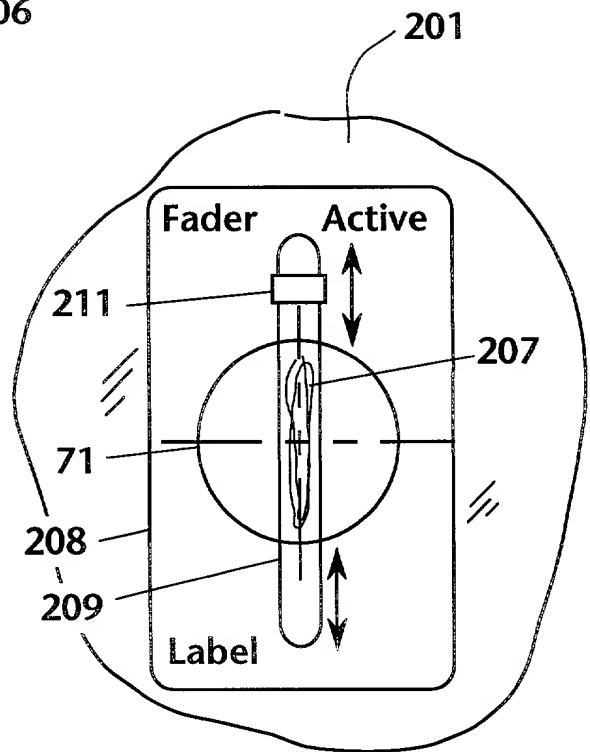


FIG. 32

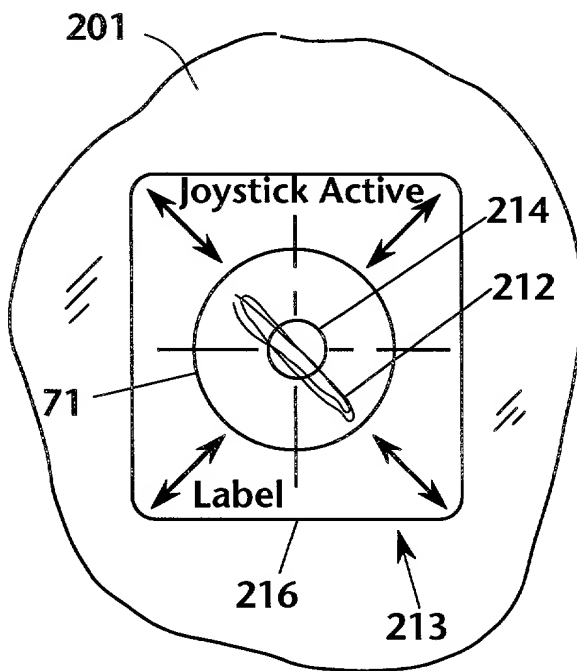


FIG. 33

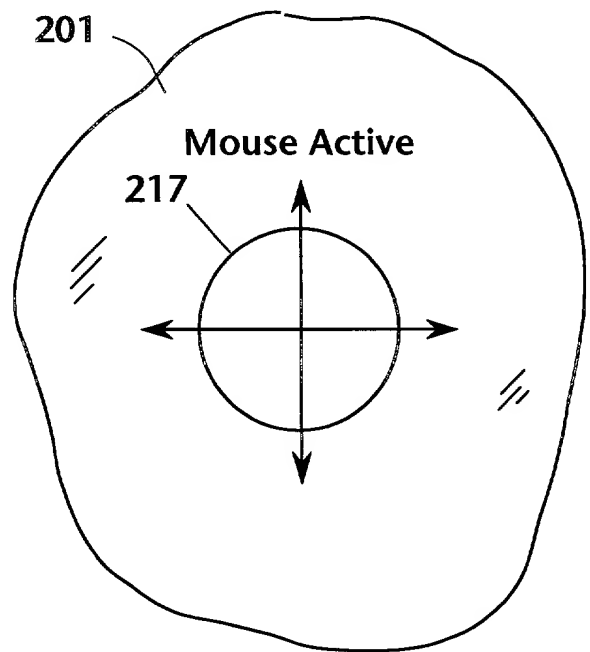


FIG. 33

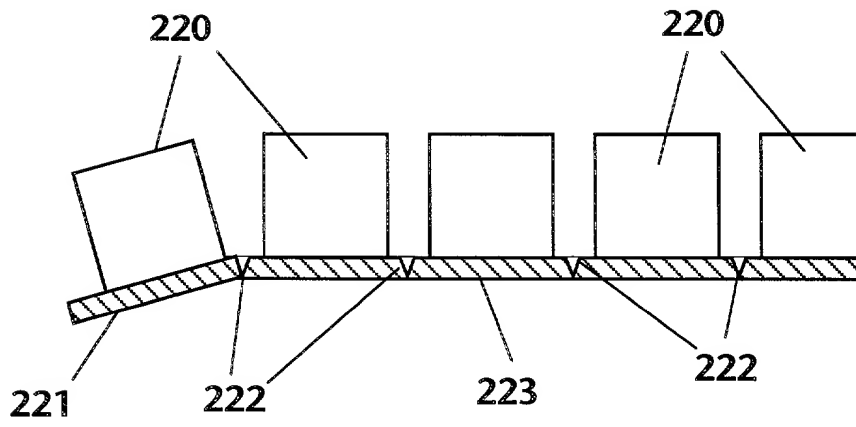


FIG. 34



## DECLARATION FOR PATENT APPLICATION

As below named inventors, we hereby declare that our residence, post office address and citizenship are as stated below.

We believe that we are the original, first and sole inventors of the matter which is claimed and for which a patent is sought on the invention titled: **TOUCH SENSOR CONTROL DEVICES**, the specification of which is attached hereto.

We hereby state that we have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

We acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

We hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)  
NONE Priority claimed                       
 (Number) (Country) (Date filed)

We hereby claim the benefit of Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, U.S. Code, § 112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Sect. 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

NONE  
 (Application Serial No.) (Filing date) (Status)

We hereby appoint the following attorney to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith:

## Address all correspondence and telephone calls to:

Harris Zimmerman, Esq.  
 Registration No. 16,437  
 1330 Broadway, Suite 710  
 Oakland, California 94612  
 [510] 465-0828

We hereby declare that all statements made herein of my knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under § 1001 of Title 18 of the U.S. Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's Full Name: Denny Jaeger Citizenship: US  
 Residence: Oakland, California  
 (City & State only)

P. O. Address: 6120 Valley View Road, Oakland, California 94611  
 (Complete address)

Signature: x  Date: x 9-25-00

Inventor's Full Name: Kenneth M. Twain Citizenship: US

Residence: Oakland, California  
(City and State only)

P.O. Address: 4029 Tompkins Avenue, Oakland, California 94619  
(Complete address)

Signature: x Kenneth A. Blum Date: 9/25/00

Inventor's Full Name: John Ream      Citizenship: US

Residence: San Jose, California  
(City and State only)

P.O. Address: 249 Omira Drive, San Jose, California 95123  
(Complete address)

Signature: x Date: \_\_\_\_\_

## Page 1 of 2

Inventor's Full Name: Kenneth M. Twain Citizenship: US

Residence: Oakland, California  
(City & State only)

P. O. Address: 4029 Thompkins Avenue, Oakland, California 94619  
(Complete address)

Inventor's Full Name: John Ream Citizenship: US

Residence: San Jose, California  
(City & State only)

P. O. Address: 249 Omira Drive, San Jose, California 95123  
(Complete address)

Signature: x  Date: x 7/22/00